



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number: **0 510 696 A1**

12

EUROPEAN PATENT APPLICATION

21 Application number: **92107070.2**

51 Int. Cl.⁵: **G09G 3/36**

22 Date of filing: **24.04.92**

30 Priority: **26.04.91 JP 97063/91**
27.06.91 JP 156821/91
22.07.91 JP 180828/91
30.07.91 JP 189913/91
05.08.91 JP 195191/91

43 Date of publication of application:
28.10.92 Bulletin 92/44

84 Designated Contracting States:
DE FR GB NL

71 Applicant: **MATSUSHITA ELECTRIC**
INDUSTRIAL CO., LTD.
1006, Oaza Kadoma
Kadoma-shi, Osaka-fu, 571(JP)

72 Inventor: **Date, Yoshito**
2-26-4 Mizudou-cho, Amagasaki-shi
Hyogo-ken 661(JP)
Inventor: **Takeshita, Shoichi**
A302 Fushimi-sou 138-8, Hazukashi
Shimizu-cho
Fushimi-ku, Kyoto-shi, Kyoto 612(JP)
Inventor: **Ohmori, Tetsuro**
1-31-3 Shodai Minamimachi, Hirakata-shi
Osaka 573(JP)
Inventor: **Nakatsuka, Junji**
B 402 Takatsuki-soy, 1-44-9 Tunoe-cho
Takatsuki-shi, Osaka 569(JP)
Inventor: **Imamura, Yoshio**
2-13-35 Nangou, Ootsu-shi
Shiga-ken 520(JP)

74 Representative: **Patentanwälte Grünecker,**
Kinkeldey, Stockmair & Partner
Maximilianstrasse 58
W-8000 München 22(DE)


54 **Liquid crystal display control system.**

57 The liquid crystal display control system of the invention comprises a liquid crystal panel, plural data latch means for storing digital gray scale data, and plural DA converters for converting the outputs of the data latch means into analog signals to be applied to the liquid crystal panel.

According to the liquid crystal display control system of the invention, the display data is digital signals, and the digital signals are processed up to the DA converters just before the liquid crystal panel. Afterwards, the digital signals are converted into analog signals in the horizontal display period of relatively slow operating speed, and therefore the analog circuits having many adjusting points may be saved. Accordingly, the adjusting positions are reduced, and the adjusting process in mass production is simplified. In the case of large screen display, in particular, although the data transfer speed is high, since the display data are digital signals, a high display quality is obtained by transferring the signals without deteriorating the display data. Moreover, the constitution is composed of digital circuits up to the DA converters just before the liquid crystal panel, and therefore, the power consumption is small, and the economy and portability are excellent, while the mounting area is reduced, thereby realizing a liquid crystal display control system of small size and light weight.

EP 0 510 696 A1

FIG. 1

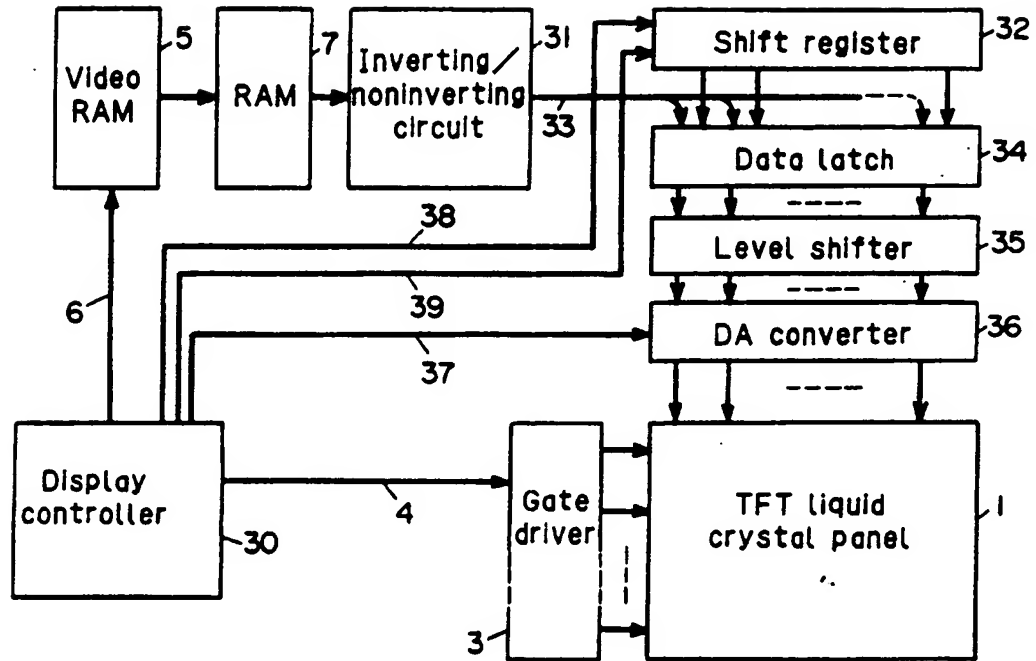

BACKGROUND OF THE INVENTION

The present invention relates to a liquid crystal display (LCD) control system used in televisions, personal computers, work stations or the like.

5 In communications appliances, information appliances, audio and visual appliances, the signal processing form is recently changing from the analog signal processing to digital data signal processing. These appliances are also in the trend of downsizing, lighter weight and smaller power consumption. As the display devices used in such appliances, the conventional cathode-ray tubes (CRTs) have been gradually replaced by thin and lightweight liquid crystal panels. For example, in personal computers, work stations,
10 televisions, visual telephones and the like, the data signals are processed digitally, and liquid crystal panels are used as display devices, and small and lightweight appliances are realized. Speaking of liquid crystal panels, in order that the liquid crystal may replace the CRT to occupy the throne of display devices, improvement of picture quality and display of high resolution must be both achieved. In the picture quality, especially, multicolor display is demanded.

15 For example, if eight-bit display for each of R, G, B (16,700,000 colors) which is closer to the natural color than four-bit display for each of R, G, B (4,096 colors) is realized, a color tone as close to the natural color as the present CRT display television will be obtained, and the applications of liquid crystal panel will be expanded dramatically. As for the high resolution display, if the high resolution liquid crystal panel in the number of dots as many as the high definition television (HDTV) is realized, the liquid crystal panel will play
20 a major role in the image field in the future.

There is hence a increasing demand for a new LCD control system applicable to the multicolor and high resolution tendency, in consideration of suitability to the digital, downsizing and lower power consumption trend of appliances and the future of the liquid crystal panel.

Hitherto, in the LCD control system for driving this type of thin film transistor (TFT) liquid crystal panel, a DA converter for converting display data into analog signal and a sample hold circuit for holding and
25 delivering the analog signal were used.

Fig. 20 is a structural diagram of a conventional LCD control system. Its operation is described below while referring to Fig. 20.

A display controller 2 delivers a gate driver control signal 4 to a gate driver 3 for controlling the gate
30 electrode of a TFT liquid crystal panel 1. The controlled gate driver 3 renders one line valid out of arbitrary lines of the TFT liquid crystal panel 1. The display controller 2 reads out, by a display address signal 6, display data from a video random access memory (RAM) 5 for storing the digital display data.

The display data stored in the video RAM 5 is the address data of a RAM 7, and it is converted into gray scale data (color scale data in the case of a color liquid crystal panel) to be applied to the TFT liquid
35 crystal panel 1 by the RAM 7. This is intended to curtail the memory capacity in the video RAM 5 by storing the gray scale data large in data quantity in the RAM 7 functioning as lookup table. Meanwhile, to change the display gray scale level (or display color), it is enough to change the gray scale data of the RAM 7 only, and, advantageously, it can be changed quickly.

The converted gray scale data is converted into analog signal by a DA converter 8. Conversion into
40 analog signal is necessary because analog signal is used for charging and discharging of the display signal to the liquid crystal capacitor attached to each pixel of the TFT liquid crystal panel 1. The display signal converted into analog signal is fed into an amplifier 10 by way of an inverting/noninverting circuit 9 composed of such analog circuit as voltage follower and the like. The inverting/noninverting circuit 9 is intended to invert the polarity of the voltage applied to the liquid crystal periodically (generally in frame
45 period), which is an essential function for driving the liquid crystal. The amplifier 10 is to boost the analog signal delivered from the DA converter 8 up to a voltage level (about 10V) to be applied to the TFT liquid crystal panel 1. A gain and offset control circuit 11 is to adjust the gain and offset of the amplifier 10 so as to obtain the optimum display quality for liquid crystal display.

The TFT liquid crystal panel 1, unlike the CRT, must be driven in the horizontal period unit because the
50 response speed of the TFT is slow. Accordingly, by holding the display signals for the portion of one line, they are produced simultaneously, which is called the line sequential driving.

A liquid crystal display signal 12 coming out of the amplifier 10 is fed into a sample hold circuit 15, and is sampled and held. The sample hold circuit 15 is same in the number of horizontal pixels as the TFT liquid crystal panel 1, and therefore the liquid crystal display signal 12 from the amplifier 10 is sampled
55 sequentially by the sample hold circuit 15 designated by a shift register 13 operating at a low voltage (about 5V).

The shift register 13 is the bits in the same number as the number of horizontal pixels of the TFT liquid crystal panel 1, and sequentially transfers pulse 18 generated from the display controller 2 in the horizontal

direction by a transfer clock 17. The transfer pulse from the shift register 13 is boosted (to about 10V) by a level shifter 14, and one of the sample hold circuits 15 is selected, and the liquid crystal display signal 12 is sampled. When all display signals of one line are sampled, the display controller 2 delivers an output timing signal 16 to the sample hold circuit 15, and the sample hold circuit 15 delivers an analog signal to be applied to the TFT liquid crystal panel 1. When the signal is applied to the TFT liquid crystal panel 1, one line out of arbitrary lines designated by the gate driver 3 is displayed.

In such conventional constitution of the LCD control system, however, the amplifier 10 having the gain and offset control circuit 11 is required, and in order to obtain an appropriate display quality, plural control points are needed in the gain and offset control circuit 11. Accordingly, the process required in adjustment procedure becomes a bottleneck for mass production. In the case of large-screen display, meanwhile, the data transfer speed is high, and high speed display signals pass through the DA converter 8, inverting/noninverting circuit 9 and amplifier 10, which are all analog circuits. As a result, the display signals are distorted, the display quality deteriorates, and a high resolution required for multicolor display is not obtained. Therefore, even if the DA converter 8 possesses the resolution of eight bits, the resolution after passing through the analog circuits may be lowered to about four bits to six bits.

Moreover, in the analog circuits of high speed and large amplitude, regardless of the signal level, the internal circuits possess a bias power source with a large current consumption or a reference current source, and therefore a large current is always flowing. Besides, the supply voltage of analog circuit must be sufficiently large as compared with the signal level of the analog signal to be processed in order to have a sufficient working range (dynamic range) of the operational amplifier. As a result, the analog circuits are large in power consumption, and, although the liquid crystal display device is small and light, the power supply unit becomes larger in size, and the portability is sacrificed, and the working time becomes short if working on batteries. Concerning reduction of size and weight, as compared with the digital circuit advanced in the degree of integration, the analog circuit requires a wide area for mounting to incorporate the diversified parts for composing the circuit including the resistors, capacitors and variable resistors. Thus, the conventional LCD control system involved many problems.

The invention is hence intended to solve these problems of the prior art by presenting an LCD control system reduced in the number of adjusting points, improved in mass productivity, capable of obtaining a high display quality, small in power consumption, and small in the mounting area.

SUMMARY OF THE INVENTION

To achieve the above object, the invention presents an LCD control system comprising a liquid crystal panel, plural data latch means for storing digital gray scale data, and plural DA converters for converting the outputs of the data latch means into analog signals to be applied to the liquid crystal panel.

In the LCD control system of the invention, the display data is digital signals, and the digital signals are processed up to the DA converter just before the liquid crystal panel. Afterwards, the digital signals are converted into analog signals in a horizontal display period slow in the operating speed relatively, and therefore the analog circuits having many adjusting points may be omitted. Accordingly, the number of adjusting points is reduced, and the adjusting processes in mass production are simplified. Besides, in particular, in the case of large screen display, although the data transfer speed is high, since the display data are digital signals, a high display quality is obtained by transferring signals without deteriorating the display data. In addition, since the structure is composed of digital circuits up to the DA converter just before the liquid crystal panel, the power consumption is small, the economy and portability are excellent, and the mounting area is reduced, so that a compact LCD control system may be realized.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the constitution of LCD control system of an embodiment of the invention,

Fig. 2 is a structural diagram showing an output circuit in a first embodiment for composing the LCD control system of the invention,

Fig. 3 is a structural diagram showing an output circuit in a second embodiment for composing the LCD control system of the invention,

Fig. 4 is a structural diagram showing an output circuit in a third embodiment for composing the LCD control system of the invention,

Fig. 5 is a structural diagram showing an output circuit in a fourth embodiment for composing the LCD control system of the invention,

- Fig. 6 is a structural diagram showing an output circuit in a fifth embodiment for composing the LCD control system of the invention,
- Fig. 7 is a structural diagram showing an output circuit in a sixth embodiment for composing the LCD control system of the invention,
- 5 Fig. 8 is a structural diagram showing an output circuit in a seventh embodiment for composing the LCD control system of the invention,
- Fig. 9 is a structural diagram showing an output circuit in an eighth embodiment for composing the LCD control system of the invention,
- Fig. 10 is an equivalent circuit diagram in charging operation of the output circuit in Fig. 9,
- 10 Figs. 11A, 11B are equivalent circuit diagrams in output operation of analog signal in the output circuit in Fig. 9,
- Fig. 12 is an operation timing chart of the output circuit in Fig. 9,
- Figs. 13 is a structural diagram showing an output circuit in a ninth embodiment for composing the LCD control system of the invention,
- 15 Fig. 14 is an equivalent circuit diagram in charging operation of the output circuit in Fig. 13,
- Fig. 15 is a structural diagram showing an output circuit using a resistance type DA converter in a tenth embodiment for composing the LCD control system of the invention,
- Fig. 16 is a structural diagram showing an output circuit using a resistance type DA converter in an eleventh embodiment for composing the LCD control system of the invention,
- 20 Fig. 17 is a structural diagram showing an output circuit using a current source type DA converter in a twelfth embodiment for composing the LCD control system of the invention,
- Fig. 18 is a structural diagram showing an output circuit using a over-sampling method DA converter in a thirteenth embodiment for composing the LCD control system of the invention,
- Fig. 19 is a timing chart for explaining the operation of the output circuit in Fig. 18,
- 25 Fig. 20 is a block diagram showing the constitution of a conventional LCD control system.

DETAILED DESCRIPTION OF THE INVENTION

Referring now to Fig. 1, the operation of LCD control system in an embodiment of the invention is described in detail below.

Fig. 1 shows a liquid crystal display control system in an embodiment of the invention. A display controller 30 delivers a gate driver control signal 4 to a gate driver 3, and the gate driver 3 renders valid an arbitrary line in a TFT liquid crystal panel 1. The display controller 30 reads out, by a display address signal 6, display data from a video RAM 5. The display data stored in the video RAM 5 is the address data of a RAM 7, and it is converted into gray scale data in the RAM 7. The gray scale data is converted into digital liquid crystal display data 33 after passing through an inverting/noninverting circuit 31.

The TFT liquid crystal panel 1 holds the display data for the portion of one line, and delivers simultaneously, which is called line sequential drive. The liquid crystal display data 33 produced from the inverting/noninverting circuit 31 is fed into a data latch 34, and is latched and held. Since the data latches 34 are as many as the number of horizontal pixels of the TFT liquid crystal panel 1, the liquid crystal display data from the inverting/noninverting circuit 31 are sequentially latched in the data latches 34 specified by a shift register 32.

The shift register 32 has as many bits as the number of horizontal pixels of the TFT liquid crystal, and transfers the pulse 39 generated by the display controller 30 sequentially in the horizontal direction by transfer clock 38. The pulse 39 which is the output of the shift register 32 specifies one data latch 34, and sequentially the data latch 34 latches the liquid crystal display data 33. The latched data is boosted by a level shifter 35, and fed into a DA converter 36. When all display data for the portion of oneline are completely latched, the display controller 30 delivers an output timing signal 37 to the DA converter 36, and the DA converter 36 produces an analog signal to be applied to the TFT liquid crystal panel 1. When the data is applied in the TFT liquid crystal panel 1, one line out of arbitrary lines specified by the gate driver 3 is displayed.

According to the LCD control system in Fig. 1, the DA converter 36 is disposed just before the TFT liquid crystal panel 1, and the gray scale data converted by the RAM 7 is processed directly in the digital form without undergoing analog processing, and therefore high speed analog circuit and control circuit are omitted, and a display screen of high quality is obtained.

Besides, the data latches 34 are provided as many as the number of horizontal pixels of the TFT liquid crystal panel 1, and adjustment-free DA converters 36 are provided as many as the number of horizontal pixels for converting the output of the data latches 34 into analog signals to be applied to the TFT liquid

crystal panel 1, so that the analog circuits are not needed, and the adjusting points required in amplifier and the like are saved, so that the mass producibility may be enhanced.

Still more, since the digital display data is converted into analog signal by the DA converter 36 just before applying signal to the pixels of the TFT liquid crystal panel 1, especially in the case of large screen display, in spite of high data transfer speed, data does not deteriorate, and is displayed in high display quality. At the same time, by transferring the display data without using analog circuits which consume much electric power, the power consumption may be saved. In addition, instead of analog circuits having a large number of parts, the display data can be transferred by the digital circuit which may be advanced in the degree of integration, and therefore the mounting surface area is reduced, so that a compact excellent LCD control system is realized.

Next, a first embodiment of an output circuit comprising a DA converter for composing the LCD control system of the invention is described while referring to Fig. 2.

In Fig. 2, n capacitors C_0, C_1, \dots, C_{n-1} possess a same capacitance C , and one electrode of each one of the capacitors C_0, C_1, \dots, C_{n-1} is grounded. The other electrode of each one of the capacitors C_0, C_1, \dots, C_{n-1} is connected with one terminal of each one of switches S_0, S_1, \dots, S_{n-1} . The switches S_0, S_1, \dots, S_{n-1} are turned on or off by selection signals L_0, L_1, \dots, L_{n-1} , respectively, while the other terminals are commonly connected.

The output circuit has a three-terminal operational amplifier 41, and an input signal 42 is fed to a noninverting input terminal B of the operational amplifier 41. The commonly connected terminals of the switches S_0, S_1, \dots, S_{n-1} are connected to the noninverting input terminal B of the operational amplifier 41. The noninverting input terminal B of the operational amplifier 41 is also connected to a power supply V_{DD} through a charging switch 43, and is grounded through a discharging switch 44. The charging switch 43 is turned on or off by a charging timing signal 45, and the discharging switch 44 is turned on or off by a discharging timing signal 46. The output Y of the operational amplifier 41 is fed back to an inverting input terminal A of the operational amplifier 41 as a feedback signal 47. The output voltage from this output circuit is produced from an output terminal V_{out} .

The operation of thus composed output circuit of the LCD control system is explained below. First, the discharging switch 44 is turned on by the discharging timing signal 46, and the charging switch 43 is turned off by the charging timing signal 45. Next, by the selection signals L_0, L_1, \dots, L_{n-1} , all switches S_0, S_1, \dots, S_{n-1} are set in ON state. As a result, the electric charge stored in all capacitors C_0, C_1, \dots, C_{n-1} is discharged.

Next, by the discharging timing signal 46, the discharging switch 44 is set in OFF state, and a specified number of switches out of the switches S_0, S_1, \dots, S_{n-1} are set in ON state by the selection signals L_0, L_1, \dots, L_{n-1} . Consequently, when the charging switch 43 is set in ON state by the charging timing signal 45, a specified number of capacitors of the capacitors C_0, C_1, \dots, C_{n-1} are charged by the specified switches out of the switches S_0, S_1, \dots, S_{n-1} in ON state.

By the charging timing signal 45, the charging switch 43 is set in OFF state, and all switches S_0, S_1, \dots, S_{n-1} are set in ON state by the selection signals L_0, L_1, \dots, L_{n-1} . As a result, all electric charge stored in a specific number of capacitors is equally distributed and averaged in all capacitors C_0, C_1, \dots, C_{n-1} , and the voltage due to the averaged electric charge is generated. Thus generated voltage is fed into the noninverting input terminal B of the operational amplifier 41 as input signal 42. Since the output Y of the operational amplifier 41 is fed to the inverting input terminal A as a feedback signal 47, the operational amplifier 41 is an amplifier with gain of 0 dB, and the voltage entering the noninverting input terminal B is directly delivered to the output terminal V_{out} .

Supposing, for example, that specific switches out of the switches S_0, S_1, \dots, S_{n-1} are set in ON state and that A pieces of capacitor out of n capacitors C_0, C_1, \dots, C_{n-1} are charged, the stored electric charge Q may be expressed in Formula (1).

$$Q = A \times C \times V_{DD} \quad (1)$$

After A pieces of capacitor are charged, by setting the charging switch 43 in OFF state and further setting all (i.e. N) switches S_0, S_1, \dots, S_{n-1} in ON state, since the electric charge Q is constant even after the stored electric charge is averaged, assuming the obtained voltage to be V_0 , the following relation is established:

$$Q = N \times C \times V_0 \quad (2)$$

Therefore, from Formula (1) and (2), we obtain

$$V_0 = (A/N) \times V_{DD} \quad (3)$$

Thus, according to the embodiment in Fig. 2, since the electric charges stored in specific capacitors
5 from the power supply

$$V_{DD}$$

10 are distributed and averaged in all capacitors C^0, C^1, \dots ,

$$C^{n-1},$$

15 by properly selecting the number of capacitors to be charged, a required voltage may be generated without setting multiple reference voltages. Therefore, the number of wirings may be notably curtailed in the LCD control system of the invention.

As described herein, since the LCD control system having the output circuit shown in Fig. 2 possesses plural capacitors having an identical capacitance, and switches attached to the individual capacitors, the
20 electric charge is stored in a specified number of capacitors by setting specific switches in ON state. Next, by stopping supply of electric charge to the capacitors, and distributing and averaging the stored electric charge in all capacitors, the voltage averaged by all these capacitors is obtained. By feeding this voltage into the amplifier, an output voltage proportional to the averaged voltage is obtained. In this way, in the LCD control system of the embodiment, by varying the number of switches to be set in ON state, a required
25 voltage may be generated, and it is not necessary to set many reference voltages as in the prior art. Therefore, according to the embodiment in Fig. 2, the number of wirings and the number of circuits may be saved in the LCD control system.

Making reference to Fig. 3, a second embodiment of the output circuit comprising a DA converter for composing the LCD control system of the invention is explained below.

30 The output circuit in Fig. 3 possesses eight capacitors $CP^0, CP^1, \dots, CP^k, \dots, CP^7$ connected in parallel, and the capacitances of the capacitors CP^0, CP^1, \dots, CP^7 are respectively reference capacitances $C, 2 \times C, \dots, 2^k \times C, \dots, 128 \times C$.

The negative side electrodes of the capacitors CP^0, CP^1, \dots, CP^7 are connected to the inverting input terminal A of the operational amplifier 41, and the positive side electrodes of capacitors CP^0, CP^1, \dots, CP^7
35 are connected to a power supply

$$-V_{ref}$$

40 for feeding a reference input voltage through discharging switches $SWB^0, SWB^1, \dots, SWB^7$, respectively. Furthermore, one of the terminals of each one of charging switches $SWA^0, SWA^1, \dots, SWA^7$ is connected to the positive side electrodes of the capacitors CP^0, CP^1, \dots, CP^7 . These charging switches $SWA^0, SWA^1, \dots, SWA^7$ are set in ON state when sampling the input voltage.

At the other terminals of the charging switches $SWA^0, SWA^1, \dots, SWA^7$, one of the terminals of each one of digital input switches SW^0, SW^1, \dots, SW^7 is connected. The digital input switches SW^0, SW^1, \dots, SW^7
45 correspond to the bits of the digital signal fed in the output circuit, and are set in ON state when the corresponding bit is 1, and set in OFF state when 0.

Furthermore, the other terminals of the digital input switches SW^0, SW^1, \dots, SW^7 are connected to a power supply

50

$$+V_{ref}$$

for supplying reference input voltage.

55 Switches are composed of the charging switches $SWA^0, SWA^1, \dots, SWA^7$, discharging switches $SWB^0, SWB^1, \dots, SWB^7$, and digital input switches SW^0, SW^1, \dots, SW^7 .

A charging switch SWA^0 is connected between the inverting input terminal A and output terminal of the operational amplifier 41. A charging switch SWA^0 is connected between the positive electrode of a negative

feedback capacitor CP_8 and the reference input voltage (power supply)

$$-V_{ref},$$

5

and it is set in ON state when sampling the input voltage of the operational amplifier 41. A discharging switch SWB_8 is connected between the positive electrode of the negative feedback capacitor CP_8 and the output

10

$$V_{out},$$

and discharges the stored electric charge.

The output Y of the operational amplifier 41 is fed back to the inverting input terminal A of the operational amplifier 41 through the charging switch SWA_8 , and is fed back to the inverting input terminal A through the discharging switch SWB_8 and negative feedback capacitor CP_8 . The noninverting input terminal B of the operational amplifier 41 is connected to the reference input voltage (power supply) $-V_{ref}$, and is connected to the inverting input terminal A through the charging switch SWA_9 and negative feedback capacitor CP_8 . The negative feedback capacitor CP_8 possesses a capacitance of $2^8 \times C$ (256C) of the reference capacitance. The output voltage generated by this output circuit is produced from the output terminal V_{out} .

The operation of thus composed output circuit of LCD control system is explained below. In the first place, the discharging switches $SWB_0, SWB_1, \dots, SWB_8$ are set in ON state. As a result, the output Y of the operational amplifier 41 is negatively fed back to the inverting input terminal A of the operational amplifier 41 through the discharging switch SWB_8 . By such negative feedback, the potential difference between the inverting input terminal A and the noninverting input terminal B becomes an offset voltage V_{off} as shown in Formula (4).

$V_{off} = (\text{potential of noninverting input terminal B of operational amplifier 41}) - (\text{potential of inverting input terminal A of operational amplifier 41})$ (4)

Besides, the potential difference between positive and negative electrodes of the capacitors CP_0, CP_1, \dots, CP_7 becomes equal also to the offset voltage V_{off} . At this time, the electric charge Q_{DCn} stored in each of the capacitors CP_0, CP_1, \dots, CP_7 is

35

$$Q_{DCn} = 2^n \times C \times V_{off} \quad [n = 0 \text{ to } 7] \quad \dots\dots\dots (5)$$

40

Consequently, the eight-bit digital input signal is fed to the digital input switches SW_0, SW_1, \dots, SW_7 , and corresponding to the individual bits of the digital input signal, the digital input switches SW_0, SW_1, \dots, SW_7 are set in ON state or OFF state. The most significant bit (MSB) of the digital input signal corresponds to the digital input switch SW_7 , and the least significant bit (LSB) of the digital input signal corresponds to the digital input switch SW_0 .

Then, after setting all of discharging switches $SWB_0, SWB_1, \dots, SWB_8$ in OFF state, all of charging switches $SWA_0, SWA_1, \dots, SWA_9$ are set in ON state. At this time, of the digital input switches SW_0, SW_1, \dots, SW_7 , the electric charge Q_{CCn} stored in the capacitors connected to the switches set in ON state is

50

$$Q_{CCn} = 2^n \times C \times ((+V_{ref}) - (-V_{ref}) + V_{off}) \quad [n = 0 \text{ to } 7] \quad \dots\dots\dots (6)$$

55

Besides, since the charging switch SWA_9 is set in ON state, the offset voltage V_{off} is applied to the negative feedback capacitor CP_8 as shown in Formula (7).

$$V_{CP8} = V_{off} \quad (7)$$

Therefore, the electric charge Q_{CP8} stored in the negative feedback capacitor CP_8 is as shown in Formula (8).

$$Q_{CP8} = 256 \times C \times V_{off} \quad (8)$$

Sequentially, after setting all of charging switches $SWA_0, SWA_1, \dots, SWA_9$ in OFF state, the discharging switches $SWB_0, SWB_1, \dots, SWB_8$ are all set in ON state. At this time, since the output Y of the operational amplifier 41 is negatively fed back to the inverting input terminal A through the discharging switch SWB_8 , the potential difference between the inverting input terminal A and the noninverting input terminal B becomes equal to the offset voltage V_{off} again.

Besides, the potential difference between the positive and negative electrodes of the capacitors CP_0, CP_1, \dots, CP_7 becomes also equal to the offset voltage V_{off} . At this time, the electric charges moving from the negative electrodes of the capacitors CP_0, CP_1, \dots, CP_7 are collected in the negative electrode of the negative feedback capacitor CP_8 . The electric charge quantity ΔQ_{CP8} moving to the negative electrode of the negative feedback capacitor CP_8 is expressed as follows, supposing the numerical value of bit information 0 or 1 of digital input signal to be bit_n .

$$\Delta Q_{CP8} = (1 \times bit_0 + 2 \times bit_1 + 4 \times bit_2 + 8 \times bit_3 + 16 \times bit_4 + 32 \times bit_5 + 64 \times bit_6 + 128 \times bit_7) \times C \times ((+V_{ref}) - (-V_{ref})) \quad (9)$$

For example, when a digital input signal of "10110010" in binary notation is supplied, bit_0, bit_2, bit_3 and bit_6 are 0 (OFF state), while bit_1, bit_4, bit_5 and bit_7 are 1 (ON state), and the electric charge quantity ΔQ_{CP8} moving to the negative electrode of the negative feedback capacitor CP_8 is determined from Formula (10).

$$\begin{aligned} \Delta Q_{CP8} &= (2+16+32+128) \times C \times ((+V_{ref}) - (-V_{ref})) \\ &= 178 \times C \times ((+V_{ref}) - (-V_{ref})) \quad \dots\dots\dots (10) \end{aligned}$$

At this time, the electric charges opposite in the polarity to the moved electric charges and same in the quantity are collected at the positive electrode of the negative feedback capacitor CP_8 . The potential of the negative electrode of the negative feedback capacitor CP_8 is at the same potential as the inverting input terminal A of the operational amplifier 41, and from Formula (4), we obtain

$$(\text{Potential at negative electrode of capacitor } CP_8) = (-V_{ref}) - V_{off} \quad (11)$$

Hence, if the electric charges are not moved by the capacitors CP_0, CP_1, \dots, CP_7 , the output V_{out} of the output circuit is obtained as follows from Formulas (7) and (11)

$$V_{out} = (-V_{ref}) - V_{off} + V_{off} = -V_{ref} \quad (12)$$

and when the electric charges are moved as in Formula (9), the output V_{out} is

$$V_{out} = (1/256) \times (1 \cdot bit_0 + 2 \cdot bit_1 + 4 \cdot bit_2 + 8 \cdot bit_3 + 16 \cdot bit_4 + 32 \cdot bit_5 + 64 \cdot bit_6 + 128 \cdot bit_7) \times ((+V_{ref}) - (-V_{ref})) + (-V_{ref}) \quad (13)$$

When the binary digital signal "10110010" shown in the example above is entered, the output is

$$V_{out} = (178/256) \times ((+V_{ref}) - (-V_{ref})) + (-V_{ref}) \quad (14)$$

Thus, in the embodiment in Fig. 3, corresponding to each bit of eight-bit digital signal, capacitors CP_0, CP_1, \dots, CP_7 having reference capacitances of 2^0 to 2^7 times, respectively, and switches for turning on or off the charging to the capacitors depending on the bit information of the input digital signal are provided, so that the electric charge corresponding to the numerical value expressed by the input digital signal are charged in the capacitors, and the output voltage proportional to the stored electric charge is obtained by the amplifier, thereby a required output voltage is obtained. That is, a necessary voltage may be generated

without setting many reference voltages. Therefore, according to the LCD control system in which the output circuit shown in Fig. 3 is incorporated, the number of wirings may be reduced significantly.

As described herein, the LCD control system having the output circuit in the embodiment in Fig. 3 comprises n capacitors connected in parallel possessing different capacitances ranging from 2 to the power of 0 to 2 to the power of $(n-1)$ of $(2^n - 1)$

$$2^n - 1$$

times as large as) the reference capacitance (n : a positive integral number), and each capacitor is provided with n switches for turning on or off the charge or discharge of electric charge, and therefore by turning on or off the n switches depending on the bit information of digital signal, the electric charge corresponding to the digital input signal is stored in the capacitors. When the voltage generated by the stored electric charge is supplied in the amplifier, the output voltage corresponding to the digital input signal is obtained. Thus, in the LCD control system having the output circuit in the embodiment in Fig. 3, a necessary voltage may be generated without having to set many reference voltages. Therefore, the number of wirings and number of circuits may be saved in the LCD control system.

Referring then to Fig. 4, a third embodiment of the output circuit comprising a DA converter for composing the LCD control system of the invention is described below.

In the output circuit in Fig. 4, two reference input voltages are supplied from a power supply $+V_{ref1/6}$ and a power supply $+V_{ref}$, and the potential difference between the power supply $-V_{ref}$ and the power supply $+V_{ref1/6}$ is $1/16$ of the potential difference between the power supply $-V_{ref}$ and the power supply $+V_{ref}$. The output circuit of the embodiment comprises eight capacitors CP_0, CP_1, \dots, CP_7 connected in parallel, and a negative feedback capacitor CP_8 . The capacitors CP_0, CP_1, \dots, CP_7 consist of a set of four capacitors CP_0 to CP_3 , and a set of another four capacitors CP_4 to CP_7 . The capacitance of capacitors CP_0 and CP_4 is the reference capacitance C , the capacitance of capacitors CP_1 and CP_5 is $2 \times C$, the capacitance of capacitors CP_2 and CP_6 is $4 \times C$, the capacitance of capacitors CP_3 and CP_7 is $8 \times C$, and the capacitance of the negative feedback capacitor CP_8 is $16 \times C$. In the embodiment, meanwhile, the positive side electrodes of the capacitors CP_0 to CP_3 are connected to the reference input voltage (power supply) $+V_{ref1/6}$ through charging switches SWA_0 to SWA_3 and digital input switches SW_0 to SW_3 , and the positive side electrodes of the capacitors CP_4 to CP_7 are connected to the reference input voltage (power supply) $+V_{ref}$ through charging switches SWA_4 to SWA_7 and digital input switches SW_4 to SW_7 . The composition of other parts is same as in the output circuit in the second embodiment shown in Fig. 3, and the corresponding parts are identified with the same reference numbers.

The operation of thus composed output circuit of the LCD control system is explained below. At the beginning, the discharging switches $SWB_0, SWB_1, \dots, SWB_8$ are set in ON state. Hence, the output Y of the operational amplifier 41 is negatively fed back to the inverting input terminal A of the operational amplifier 41 through the discharging switch SWB_8 and the negative feedback capacitor CP_8 . By such negative feedback, the potential difference between the inverting input terminal A and noninverting input terminal B becomes the offset voltage V_{off} as shown in Formula (15).

$$V_{off} = (\text{potential of noninverting input terminal B of operational amplifier 41}) - (\text{potential of inverting input terminal A of operational amplifier 41}) \quad (15)$$

The potential difference between positive and negative electrodes of capacitors CP_0, CP_1, \dots, CP_7 is also equal to the offset voltage. At this time, the electric charge quantity Q_{0cn} charged in the capacitors CP_0, CP_1, \dots, CP_7 is

$$\begin{aligned} Q_{0cn} &= 2^n \times C \times V_{off} & (n = 0 \text{ to } 3) \\ Q_{0cn} &= 2^{n-4} \times C \times V_{off} & (n = 4 \text{ to } 7) \end{aligned} \quad \dots\dots\dots (16)$$

Consequently, an eight-bit digital input signal is fed in the digital input switches SW_0, SW_1, \dots, SW_7 , and corresponding to each bit of the digital signal, the digital input switches SW_0, SW_1, \dots, SW_7 are set in ON state or OFF state. The most significant bit (MSB) of the digital input signal corresponds to the digital input switch SW_7 , and the least significant bit (LSB) of the digital input signal corresponds to the digital input switch SW_0 .

After setting all of discharging switches $SWB_0, SWB_1, \dots, SWB_8$ in OFF state, all of charging switches $SWA_0, SWA_1, \dots, SWA_9$ are set in ON state. At this time, the electric charge Q_{cn} charged in the capacitors connected to the switches set in ON state out of the digital input switches SW_0, SW_1, \dots, SW_7 is as follows.

$$\begin{aligned} Q_{cn} &= 2^n \times C \times ((+V_{ref}) - (-V_{ref})) / 16 + V_{off} \quad [n = 0 \text{ to } 3] \\ Q_{cn} &= 2^{n-4} \times C \times ((+V_{ref}) - (-V_{ref}) + V_{off}) \quad [n = 4 \text{ to } 7] \\ &\dots\dots\dots (17) \end{aligned}$$

Besides, since the charging switch SWA_9 is set in ON state, an offset voltage V_{off} is applied to the capacitor CP_8 as shown in Formula (18).

$$V_{CP8} = V_{off} \quad (18)$$

Therefore, the electric charge Q_{CP8} stored in the negative feedback capacitor CP_8 is as shown in Formula (19).

$$Q_{CP8} = 16 \times C \times V_{off} \quad (19)$$

Next, after setting all of charging switches $SWA_0, SWA_1, \dots, SWA_9$ in OFF state, all of discharging switches $SWB_0, SWB_1, \dots, SWB_8$ are set in ON state. At this time, since the output Y of the operational amplifier 41 is negatively fed back to the inverting input terminal A through the discharging switch SWB_8 and the negative feedback capacitor CP_8 , the potential difference between the inverting input terminal A and the noninverting input terminal B becomes equal to the offset voltage V_{off} again. At the same time, the potential difference between the positive and negative electrodes of the capacitors CP_0, CP_1, \dots, CP_7 becomes also equal to the offset voltage V_{off} . At this time, the electric charges moving from the negative electrodes of the capacitors CP_0, CP_1, \dots, CP_7 are collected at the negative electrode of the negative feedback capacitor CP_8 . The electric charge quantity ΔQ_{CP8} moving to the negative electrode of the negative feedback capacitor CP_8 is as follows, expressing the numerical value of the bit information 0 or 1 of digital input signal as bitn.

$$\begin{aligned} \Delta Q_{CP8} &= (1/16) \times (1 \cdot \text{bit}0 + 2 \cdot \text{bit}1 + 4 \cdot \text{bit}2 + 8 \cdot \text{bit}3) \times C \times ((+V_{ref}) \\ &\quad - (-V_{ref})) + (1 \cdot \text{bit}4 + 2 \cdot \text{bit}5 + 4 \cdot \text{bit}6 + 8 \cdot \text{bit}7) \times C \times ((+V_{ref}) \\ &\quad - (-V_{ref})) \\ &= (((1 \cdot \text{bit}0 + 2 \cdot \text{bit}1 + 4 \cdot \text{bit}2 + 8 \cdot \text{bit}3) / 16) + (1 \cdot \text{bit}4 + 2 \cdot \text{bit}5 \\ &\quad + 4 \cdot \text{bit}6 + 8 \cdot \text{bit}7)) \times C \times (+V_{ref}) - (-V_{ref})) \\ &\dots\dots\dots (20) \end{aligned}$$

For example, when a digital input signal of "10110010" in binary notation is supplied, bit0, bit2, bit3 and bit6 are 0 (OFF state), and bit1, bit4, bit5 and bit7 are 1 (ON state), and the electric charge quantity ΔQ_{CP8} moving to the negative electrode of the negative feedback capacitor CP_8 at this time is obtained from Formula (21).

$$\begin{aligned} \Delta Q_{CP8} &= (2/16 + 1 + 2 + 8) \times C \times ((+V_{ref}) - (-V_{ref})) \\ &= (178/16) \times C \times ((+V_{ref}) - (-V_{ref})) \dots\dots\dots (21) \end{aligned}$$

At this time, the electric charges of the same quantity of the charges being moved and opposite in polarity are collected at the positive electrode of the negative feedback capacitor CP_8 . The potential of the

negative electrode of the negative feedback capacitor CP_8 is same as the potential at the inverting input terminal A of the operational amplifier 41, and from Formula (15) it is known as follows.

$$(\text{Potential at negative electrode of capacitor } CP_8) = (-V_{ref}) - V_{off} \quad (22)$$

Hence, if the electric charges are not moved by the capacitors CP_0 , CP_1 , ..., CP_7 , the output V_{out} of the output circuit is calculated from Formulas (18) and (22) as follows

$$V_{out} = (-V_{ref}) - V_{off} + V_{off} = -V_{ref} \quad (23)$$

and when the electric charges are moved as shown in Formula (20), it follows that

$$V_{out} = (1/16) \times ((1 \cdot \text{bit}0 + 2 \cdot \text{bit}1 + 4 \cdot \text{bit}2 + 8 \cdot \text{bit}3) / 16 + 1 \cdot \text{bit}4 + 2 \cdot \text{bit}5 + 4 \cdot \text{bit}6 + 8 \cdot \text{bit}7) \times ((+V_{ref}) - (-V_{ref})) + (-V_{ref}) \quad (24)$$

When the binary digital signal "10110010" in the example above is entered, the output is

$$V_{out} = (178/256) \times ((+V_{ref}) - (-V_{ref})) + (-V_{ref}) \quad (25)$$

Thus, according to the embodiment in Fig. 4, capacitors consist of two sets of capacitors comprising four capacitors, of which capacitance ranges from 2^0 to 2^3 of the specified reference capacitance, and the two sets are supplied with voltages of 2^0 and

$$2^{-4}$$

(1/16) of the reference voltage $+V_{ref}$, and therefore by turning on or off the eight switches provided in the capacitors CP_0 , CP_1 , ..., CP_7 corresponding to the bit information of eight-bit digital signal, the electric charge corresponding to the numerical value expressed by the input digital signal is stored in the capacitors. The voltage proportional to the stored electric charge is generated by the operational amplifier 41, and an output voltage corresponding to the input digital signal is obtained. Besides, by the constitution of the embodiment, the total capacitance value of the capacitors for composing the output circuit may be reduced to about 1/11 of that of the output circuit in the second embodiment.

As explained herein, the LCD control system possessing the output circuit in Fig. 4 comprises n capacitors consisting of m sets possessing different capacitance ranging from 2 to the power of 0 to 2 to the power of $(n-1)$ of $(2^0$ to

$$2^{n-1}$$

times as large as) the specified reference capacitance value (n : a positive integral number), and power supply group for supplying voltages ranging from 2 to the power of $(-n) \times 0$ to 2 to the power of $(-n) \times (m-1)$ of

$$\{2^{(-n) \times 0} \text{ to } 2^{(-n) \times (m-1)}\}$$

times as large as] the specified reference voltage to m sets (n, m : positive integral numbers), and therefore by turning on or off the $n \times m$ switches disposed in the capacitors on the basis of the bit information of the digital signal, the electric charge corresponding to the digital input signal is stored in the capacitors. The voltage proportional to the stored electric charge is generated by the amplifier, and an output voltage corresponding to the digital input signal is obtained without having to set many reference voltages. Therefore, according to the embodiment, the number of wirings and number of circuits may be reduced in the LCD control system.

A fourth embodiment of an output circuit comprising a DA converter for composing the LCD control system of the invention is described below by reference to Fig. 5.

The output circuit in Fig. 5 possesses eight capacitors CP_0 , CP_1 , ..., CP_7 connected in parallel, a negative feedback capacitor CP_8 , and a dividing capacitor CP_9 . The capacitors CP_0 , CP_1 , ..., CP_7 consist of

one set composed of four capacitors CP_0 to CP_3 , and the other set composed of four capacitors CP_4 to CP_7 . These capacitors CP_0 , CP_1 , ..., CP_7 correspond to each bit of the eight-bit digital signal, and in the embodiment in Fig. 5, the capacitors CP_0 to CP_3 correspond to the lower four bits, and the capacitors CP_4 to CP_7 , to the upper four bits.

5 The dividing capacitor CP_8 is connected in series to one set of capacitors CP_0 to CP_3 , and divides the voltage generated by the capacitors CP_0 to CP_3 corresponding to the lower four bits. The dividing capacitor CP_8 is connected parallel to the other set of capacitors CP_4 to CP_7 .

The capacitance of capacitors CP_0 and CP_4 is the reference capacitance C , the capacitance of capacitors CP_1 and CP_5 is $2 \times C$, the capacitance of capacitors CP_2 and CP_6 is $4 \times C$, the capacitance of capacitors CP_3 and CP_7 is $8 \times C$, the capacitance of the negative feedback capacitor CP_8 is $16 \times C$, and the capacitance of the dividing capacitor CP_9 is the reference capacitance C .

The negative side electrodes of the capacitors CP_0 to CP_3 corresponding to the lower four bits are connected to the positive side electrode of the dividing capacitor CP_9 , and the negative side electrode of the dividing capacitor CP_9 and the capacitors CP_4 to CP_7 corresponding to the upper four bits are connected to the inverting input terminal A of the operational amplifier 41.

The positive side electrodes of the capacitors CP_0 , CP_1 , ..., CP_7 are connected to the power supply $-V_{ref}$ for supplying reference input voltage through discharging switches SWB_0 , SWB_1 , ..., SWB_7 turned on or off depending on the bit data of the digital signal, and are likewise connected to the power supply $+V_{ref}$ for supplying reference input voltage through charging switches SWA_0 , SWA_1 , ..., SWA_7 turned on or off depending on the bit data of the digital signal.

20 A sampling circuit is composed of the capacitors CP_0 , CP_1 , ..., CP_7 , charging switches SWA_0 , SWA_1 , ..., SWA_7 , and discharging switches SWB_0 , SWB_1 , ..., SWB_7 , while a DA converter is composed of the operational amplifier 41 and negative feedback capacitor CP_8 .

The charging switches SWA_0 , SWA_1 , ..., SWA_7 are set in ON state when sampling the input voltage. Switches are composed of the charging switches SWA_0 , SWA_1 , ..., SWA_7 and discharging switches SWB_0 , SWB_1 , ..., SWB_7 .

The other constitution is same as in the output circuit shown in Fig. 4, and the corresponding parts are identified with the same reference numbers. For the sake of simplicity of explanation, as shown in Fig. 5, the potential at the negative side electrodes of the capacitors CP_0 to CP_3 is supposed to be V_1 , and the potential at the negative side electrodes of the dividing capacitor CP_9 and the capacitors CP_4 to CP_7 , to be V_2 .

The operation of thus composed output circuit of the LCD control system is described below.

The operational amplifier 41 functions so that the inverting and noninverting input terminals A, B may be always at identical potential, and therefore in the stationary state the inverting and noninverting input terminals A, B are at the reference input voltage $-V_{ref}$. Therefore, the reference input voltage $-V_{ref}$ is applied also to the negative electrodes of the capacitors CP_4 to CP_7 corresponding to the upper four bits.

On the other hand, the reference input voltage $-V_{ref}$ appearing at the inverting input terminal A of the operational amplifier 41 is divided by the parallel capacitance of the capacitors CP_0 to CP_3 corresponding to the lower four bits, and the dividing capacitor CP_9 , and the potential V_1 is applied to the negative electrodes of the capacitors CP_0 to CP_3 corresponding to the lower four bits.

40 In this state, depending on the specified input digital signal, for example, the charging switches SWA_0 , SWA_1 , ..., SWA_7 are set in ON state, and at the same time the charging switches SWA_8 , SWA_9 are set in ON state, and all of discharging switches SWB_0 , SWB_1 , ..., SWB_8 are set in OFF state. At this time, a potential of $-V_{ref}$ is applied to both ends of the negative feedback capacitor CP_8 .

45 On the other hand, the reference input voltage $+V_{ref}$ is applied to the positive electrodes of the capacitors CP_4 to CP_7 corresponding to the upper four bits through the charging switches SWA_4 , ..., SWA_7 . As a result, the capacitors CP_4 to CP_7 are charged. This is the state of sampling depending on the input digital signal.

Next, when the charging switches SWA_0 , SWA_1 , ..., SWA_9 are set in OFF state, and the discharging switch SWB_4 , ..., SWB_8 are set in ON state, the electric charges stored in the capacitors CP_4 to CP_7 are moved to the negative feedback capacitor CP_8 . The voltage generated as a result of this movement of electric charges is delivered as the output V_{out} through the discharging switch SWB_8 . In consequence, the voltage of the output V_{out} being so far the reference input voltage $-V_{ref}$ changes to the voltage corresponding to the electric charges stored in the negative feedback capacitor CP_8 . This voltage depends on the input digital signal, and thereby digital-to-analog conversion has been substantially effected.

Shown above is a case of simultaneous charging of the capacitors CP_4 to CP_7 corresponding to the upper four bits, but it is the same when other digital signal is fed. For example, when a digital signal to charge any one of the capacitors CP_0 to CP_3 corresponding to the lower four bits is fed, instead of the

reference input voltage $-V_{ref}$, charging is effected on the basis of the divided potential V_1 , and the fundamental sampling and amplifying actions are quite the same.

Thus, in the output circuit comprising a digital-to-analog converter in Fig. 5, the resolution of 1/16 is realized by the capacitors CP_4 to CP_7 corresponding to the upper four bits, and the resolution of 1/256 is realized by the capacitors CP_0 to CP_3 corresponding to the lower four bits.

The digital-to-analog conversion action of the digital-to-analog converter in Fig. 5 is explained practically below by using numerical expressions.

In the first place, the electric charge at the negative side electrodes of the capacitors CP_0 , CP_1 , CP_2 , CP_3 corresponding to the lower four bits and the dividing capacitor CP_9 is numerically expressed, by supposing that a charge K (coulomb) is present, as being not neutralized. Here, assuming the potential of the positive side electrode of the capacitor CP_n to be V_{CPn} , it follows that

$$\begin{aligned} K &= C \times (V_{CP0} - V_1) + 2 \times C \times (V_{CP1} - V_1) + 4 \times C \times (V_{CP2} - V_1) \\ &\quad + 8 \times C \times (V_{CP3} - V_1) + C \times (V_2 - V_1) \\ K/C &= V_{CP0} + 2 \times V_{CP1} + 4 \times V_{CP2} + 8 \times V_{CP3} - 16 \times V_1 + V_2 \\ &\quad \dots\dots\dots (26) \end{aligned}$$

After first setting the discharge switches SWB_0 , SWB_1 , ..., SWB_8 in OFF state, the charging switches SWA_0 , SWA_1 , ..., SWA_9 are set in ON state. As a result, V_{CP0} to V_{CP7} become $+V_{ref}$. At this time, the charging switch SWA_8 is in ON state, and the output Y (output V_{out}) of the operational amplifier 41 is negatively fed back to the inverting input terminal A of the operational amplifier 41 through the charging switch SWA_8 , and therefore the potential V_2 becomes as follows, with respect to the offset voltage V_{off} generated between the noninverting input terminal B and inverting input terminal A of the operational amplifier 41.

$$V_2 = (-V_{ref}) - V_{off} \dots\dots\dots (27)$$

On the other hand, the divided potential V_1 at the negative side electrode of the capacitors CP_0 to CP_3 becomes as follows from Formulas (26) and (27):

$$\begin{aligned} K/C &= (+V_{ref}) + 2 \times (+V_{ref}) + 4 \times (+V_{ref}) + 8 \times (+V_{ref}) \\ &\quad - 16 \times V_1 + (-V_{ref}) - V_{off} \\ V_1 &= (15 \times (+V_{ref}) + (-V_{ref}) - V_{off} - K/C) / 16 \dots\dots\dots (28) \end{aligned}$$

At this time, since the charging switch SWA_9 is set in ON state, the positive side electrode of the negative feedback capacitor CP_8 is connected to the reference input potential (power supply)

$$-V_{ref},$$

and an offset voltage

$$V_{off}$$

is applied to the negative feedback capacitor CP_8 as shown in Formula (29). Therefore, the voltage

$$V_{CP8}$$

at both ends of the negative feedback capacitor CP_8 is

$$V_{CP8} = V_{ref} \dots \dots \dots (29)$$

5 Then, after setting the charging switches SWA⁸ and SWA⁹ in OFF state, the discharging switch SWB⁸ is set in ON state, and the ON or OFF state is set for the charging switches SWA⁰, SWA¹, ..., SWA⁷ and discharging switches SWB⁰, SWB¹, ..., SWB⁷ corresponding to the bits on the basis of the bit information of the input eight-bit digital signal. The most significant bit (MSB) of the digital input corresponds to the charging switch SWA⁷ and discharging switch SWB⁷, and the least significant bit (LSB) corresponds to the charging switch SWA⁰ and discharging switch SWB⁰.

10 For example, when bit n is 1, the charging switch SWAⁿ is set in OFF state, and the discharging switch SWBⁿ is set in ON state. When bit n is 0, the charging switch SWAⁿ is set in ON state and the discharging switch SWBⁿ is set in OFF state. At this time, the potential V₁ is obtained as follows, supposing each bit of the eight-bit digital input signal to be bit0 (LSB) to bit7 (MSB), and its inverted data to be Nbit0 (LSB) to Nbit7 (MSB):

$$\begin{aligned} K/C &= ((+V_{ref}) \times Nbit0 + (-V_{ref}) \times bit0) + 2 \times ((+V_{ref}) \times Nbit1 \\ &\quad + (-V_{ref}) \times bit1) + 4 \times ((+V_{ref}) \times Nbit2 + (-V_{ref}) \times bit2) \\ 20 &\quad + 8 \times ((+V_{ref}) \times Nbit3 + (-V_{ref}) \times bit3) - 16 \times V_1 \\ &\quad + (-V_{ref}) - V_{offset} \\ K/C &= (+V_{ref}) \times (Nbit0 + 2 \times Nbit1 + 4 \times Nbit2 + 8 \times Nbit3) \\ 25 &\quad + (-V_{ref}) \times (bit0 + 2 \times bit1 + 4 \times bit2 + 8 \times bit3) \\ &\quad - 16 \times V_1 + (-V_{ref}) - V_{offset} \\ V_1 &= ((+V_{ref}) \times (Nbit0 + 2 \times Nbit1 + 4 \times Nbit2 + 8 \times Nbit3) \\ 30 &\quad + (-V_{ref}) \times (bit0 + 2 \times bit1 + 4 \times bit2 + 8 \times bit3) \\ &\quad + (-V_{ref}) - V_{offset} - K/C)/16 \dots \dots \dots (30) \end{aligned}$$

35 Since the operational amplifier 41 is negatively fed back, a potential difference corresponding to the offset voltage shown in Formula (31) is generated between the inverting input terminal A and noninverting input terminal B.

$$V_{off} = (\text{potential of noninverting input terminal B of operational amplifier 41}) - (\text{potential of inverting input terminal A of operational amplifier 41}) \quad (31)$$

Therefore, the potential V₂ is, same as in Formula (27):

$$V_2 = (-V_{ref}) - V_{off} \quad (32)$$

45 Accordingly, when the voltage applied to the voltages V_{CP0} to V_{CP7} applied to the positive side electrode of the capacitors CP₀, CP₁, ..., CP₇ is changed from +V_{ref} to -V_{ref}, the electric charge at the negative side electrodes of the dividing capacitor CP₃ and the capacitors CP₄, CP₅, CP₆, CP₇ corresponding to the upper four bits are moved to the negative side electrode of the negative feedback capacitor CP₈. The electric charge quantity ΔQ_{CPn} moving from these capacitors CP₄ to CP₇ is

$$\begin{aligned} \Delta Q_{CPn} &= 2^{n-4} \times C \times ((+V_{ref}) - (-V_{ref}) \times bitn) \quad (n = 4 \text{ to } 7) \\ 55 &\dots \dots \dots (33) \end{aligned}$$

Formula (33) is to express the upper four bits.

The electric charge quantity ΔQ_{CP9} moving from the dividing capacitor CP_9 is

$$\Delta Q_{CP9} = - (C/16) \times ((-V_{ref}) \times (1 \cdot \text{bit0} + 2 \cdot \text{bit1} + 4 \cdot \text{bit2} + 8 \cdot \text{bit3}) + (+V_{ref}) \times (1 \cdot \text{Nbit0} + 2 \cdot \text{Nbit1} + 4 \cdot \text{Nbit2} + 8 \cdot \text{Nbit3} - 15)) \quad (34)$$

Formula (34) is to express the lower four bits.

Supposing all bits of the digital input signal to be 0, the electric charge quantity ΔQ_{CP8} moving to the negative feedback capacitor CP_8 is known as follows from Formulas (33) and (34):

$$\Delta Q_{CP8} = 0 \quad (35)$$

Therefore, from Formulae (29) and (32), the output V_{out} from the operational amplifier 41 is

$$V_{out} = -V_{ref} \quad (36)$$

For example, when a digital input signal of "10110010" in binary notation is supplied, bit0, Nbit1, bit2, bit3, Nbit4, Nbit5, bit6 and Nbit7 are 0, and Nbit0, bit1, Nbit2, Nbit3, bit4, bit5, Nbit6 and bit7 are 1, and the output V_{out} from the operational amplifier 41 is, from Formulas (33) and (34), as follows:

$$\begin{aligned} V_{out} &= -((-V_{ref}) \times (0 + 2 \times 1 + 4 \times 0 + 8 \times 0) \\ &\quad + (+V_{ref}) \times (1 + 2 \times 0 + 4 \times 1 + 8 \times 1 - 15))/256 \\ &\quad + (((+V_{ref}) - (-V_{ref})) \times 1 \\ &\quad + 2 \times ((+V_{ref}) - (-V_{ref})) \times 1 \\ &\quad + 4 \times ((+V_{ref}) - (-V_{ref})) \times 0 \\ &\quad + 8 \times ((+V_{ref}) - (-V_{ref})) \times 1)/16 + (-V_{ref}) \\ &= ((+V_{ref}) - (-V_{ref})) \times 178/256 + (-V_{ref}) \dots \dots \dots (37) \end{aligned}$$

In this way, the voltage corresponding to the input digital signal is obtained in the output V_{out} , and digital-to-analog conversion is effected.

Thus, according to the embodiment in Fig. 5, comprising one dividing capacitor CP_9 connected in series to a set of capacitors CP_0 to CP_3 corresponding to the lower four bits of the digital signal, and connected in parallel to a set of capacitors CP_4 to CP_7 corresponding to the upper four bits, the electric charge stored in the set of capacitors CP_0 to CP_3 corresponding to the lower four bits is distributed in the dividing capacitor CP_9 , and the voltage proportional to the stored electric charge in the dividing capacitor CP_9 and the set of capacitors CP_4 to CP_7 corresponding to the upper four bits is generated by the operational amplifier 41. Meanwhile, the number of switches and the capacitance in the embodiment are reduced sameas in the output in the third embodiment shown in Fig. 4, while the reference power supply does not require the power supply of $+V_{ref16}$ as used in the fourth embodiment, and it is possible to operate with two reference voltages.

As described herein, the LCD control system having the output circuit of the embodiment in Fig. 5 comprises (m-1) dividing capacitors connected in series to the capacitors in each set excluding the set corresponding to the most significant n bits of digital signal, and connected in series of the capacitors of the set corresponding to the next significant n bits, and therefore the electric charge stored in the capacitors in the set excluding the set corresponding to the most significant n bits is distributed in the electric charge of the dividing capacitor. The voltage proportional to the stored electric charges in the dividing capacitors and the capacitors of the set corresponding to the most significant n bits is generated by the operational amplifier, and an output voltage corresponding to the digital input signal may be obtained without having to set many reference voltages as in the prior art. Therefore, according to the embodiment, the number of wirings and the number of circuits in the LCD control system may be reduced.

A fifth embodiment of an output circuit comprising a DA converter for composing the LCD control system of the invention is described below while referring to Fig. 6.

In order to inspect the capacitors of the capacitive type DA converters shown in Fig. 2 through Fig. 5,

the inspection precision of 2 to the n th power (n : a positive integral number) is needed depending on the increase of the number of bits. Accordingly, if the number of bits is particularly large in digital signal, an inspection apparatus of an extremely high inspection precision is required.

The output circuit in Fig. 6 is intended to solve such problem, and is to present an LCD control system capable of inspecting capacitors corresponding to all bits of input digital signal by using an inspection apparatus of a relatively low inspection precision.

In Fig. 6, a test switch SWT is connected between both ends of a dividing capacitor CP_9 . The other constitution is same as in the output circuit in the fourth embodiment shown in Fig. 5, and the corresponding parts are identified with the same reference numbers.

In thus composed LCD control system, its operation is described below.

At the time of digital-to-analog conversion, the test switch SWT is set in OFF state, and the operation of digital-to-analog conversion is same as in the output circuit in the fourth embodiment shown in Fig. 5, and its explanation is omitted.

The inspection of the LCD control system is explained.

Inspection is effected, with the tester (not shown) connected to the output V_{out} , by measuring the output V_{out} by turning on or off the charging switches $SWA_0, SWA_1, \dots, SWA_7$, and discharging switches $SWB_0, SWB_1, \dots, SWB_8$.

The LCD control system in Fig. 6 is intended to convert the eight-bit digital signal into an analog signal, and it is therefore necessary to measure the output voltage, at a precision of $1/256$ of the reference input voltage, depending on the ON or OFF state of the charging switches $SWA_0, SWA_1, \dots, SWA_7$, and discharging switches $SWB_0, SWB_1, \dots, SWB_8$. That is, as for the capacitors CP_4 to CP_7 corresponding to the upper four bits, it is enough to measure the changes of the output voltage at a precision of $1/16$ of the reference input voltage. For example, when the reference input voltage is 5 (V), the precision of $5/16$ (V), that is, about 300 mV is needed. As for the capacitors CP_0 to CP_3 corresponding to the lower four bits, a precision of its further $1/16$ is needed.

Some of the analog testers have a precision of about 10 mV, and with such analog testers, the DA converters shown in Figs. 2 to 5 may be sufficiently inspected. Generally, however, analog testers have only several terminals, and they are not suited to inspection of DA converters having more than 100 terminals. Yet, analog testers are very expensive.

On the other hand, digital testers generally have about 200 terminals, and are hence suited to inspection of DA converters. However, the precision of digital testers is about 50 mV, at best.

Therefore, the capacitors CP_4 to CP_7 of upper four bits requiring precision of only about 300 mV may be sufficiently measured by the digital testers with a precision of about 50 mV, but the capacitors CP_0 to CP_3 of lower four bits requiring a precision of its $1/16$ cannot be measured by the digital testers having a precision of only 50 mV.

In the embodiment, accordingly, when testing the capacitors CP_0 to CP_3 of lower four bits, the test switch SWT is set in ON state, and the both ends of the dividing capacitor CP_9 are short-circuited.

In this way, the connective relationship of the capacitors CP_0 to CP_3 of the lower four bits to the operational amplifier 41 is same as the connective relationship of the capacitors CP_4 to CP_7 of the upper four bits to the operational amplifier 41. Therefore, the change of output V_{out} due to capacitors CP_0 to CP_3 of lower four bits is about 300 mV, same as the change of output V_{out} due to capacitors CP_4 to CP_7 of upper four bits. As a result, it is enough to measure with a digital tester having a precision of about 50 mV.

Thus, in the embodiment shown in Fig. 6, a sampling circuit is composed of plural first capacitors corresponding to each lower bit of the input digital signal, plural second capacitors corresponding to each upper bit of input digital signal, plural switches turned on or off depending on the input digital signal and controlling charging and discharging of the capacitors of the first and second capacitors, and a dividing capacitor connected between the common node of the first capacitors and the common node of the second capacitors, and the voltage corresponding to the electric charge quantity appearing in the common node of the second capacitors is amplified by the amplifier and delivered as analog signal, and a switch is connected parallel to the dividing capacitor.

In this constitution, as for the first capacitors corresponding to the lower bits, too, the connective relationship may be set same as in the second capacitors corresponding to the upper bits by turning on the switch connected parallel to the dividing capacitor and short-circuiting the both ends of the dividing capacitor. Accordingly, it is possible to inspect at the same precision as in the second capacitors corresponding to the upper bits. Therefore, the capacitors corresponding to all bits can be inspected by using an inspection apparatus of a relatively low inspection precision.

Shown below are sixth and seventh embodiments of the output circuit comprising a DA converter for composing the LCD control system of the invention.

In the constitution of the capacitive type DA converter above, the operating point of the operational amplifier is either at the potential ($+V_{ref}$) or at the potential ($-V_{ref}$), and is biased to the periphery of the dynamic range of the operational amplifier. It is hence susceptible to fluctuations of supply voltage, and the supply voltage characteristics are poor.

5 The six and seventh embodiments of the invention are intended to present the LCD control system capable of solving such problems.

In the sixth embodiment, the mutually different first and second potentials are selectively applied to one end of the capacitor according to the input digital data, and the other end of the capacitor is connected to the inverting input terminal of the operational amplifier. At the same time, a potential nearly in the middle of
10 the first and second potentials is applied to the noninverting input terminal of the operational amplifier, and the same potential as the first or second potential selectively applied to the other end of the feedback capacitor of which one end is connected to the inverting input terminal of the operational amplifier.

In the LCD control system of the seventh embodiment, the mutually different first and second potentials, and a third potential nearly in the middle of the first and second potentials are selectively applied to one
15 end of the capacitor according to the input digital data, and the other end of the capacitor is connected to the inverting input terminal of the operational amplifier, and a same potential as the third potential is applied to the noninverting input terminal of the operational amplifier, and a feedback capacitor is connected between the inverting input terminal and output terminal of the operational amplifier.

In this constitution, the operating point of the operational amplifier may be set at a middle voltage of the
20 first and second potentials, and the operational amplifier may be operated nearly in the middle of its dynamic range. As a result, the LCD control system resistant to fluctuations of supply voltage and excellent in supply voltage characteristics may be obtained.

Referring now to Fig. 7 and Fig. 8 the sixth and seventh embodiments of the output circuit comprising a DA converter for composing the LCD control system of the invention are described in detail below.

25 Fig. 7 is a structural diagram showing the output circuit in the sixth embodiment of the LCD control system of the invention. In Fig. 7, when each analog switch SWA or SWB is in ON state, each potential

$$V_{i\ a}$$

30 or

$$V_{i\ b}$$

35 is applied to one end of the capacitor CA. It is supposed here that the potential

$$V_{i\ n\ s}$$

40 is lower than the potential

$$V_{i\ n\ s}$$

45 The other end of the capacitor CA is connected to the inverting input terminal A of the operational amplifier 41 through a node at which a potential VB appears. The noninverting input terminal B of the operational amplifier 41 is connected to a potential VC.

One end of the feedback capacitor CB is connected to analog SWE the inverting input terminal A of the
50 operational amplifier 41. An analog switch SWF is connected between a inverting input terminal A and an output terminal

$$V_{o\ u\ t}$$

55 of the operational amplifier 41. An analog switch SWE is connected between the other end of the feedback capacitor CB and output terminal

V_{out}

When an analog switch SWD is set in ON state, the potential VD is applied to the feedback capacitor CB.

- 5 Concerning the capacitive type DA converter incorporated in thus composed LCD control system of the embodiment in Fig. 7, its operation is described below. Provided that, as shown in Formula (38), the potential VD is supposed to be same as the potential V_{inb} , and the potential VC is in the middle between the potential V_{ina} and potential V_{inb} .

10 Potential VD = potential V_{inb}
 Potential VC = [potential V_{inb} + potential V_{ina}]/2 (38)

- 15 The operation of the capacitive type DA converter consists of the charge cycle of the electric charges into the capacitor CA, and the discharge cycle of the movement of the electric charges from the capacitor CA to the feedback capacitor CB and consequent output of the analog voltage from output terminal V_{out} .

First, in the charge cycle, the analog switch SWA, analog switch SWF, and analog switch SWD are in ON state, while the analog switch SWB and analog switch SWE are in OFF state. Accordingly, the potential
 20 VA is equal to the potential V_{ina} . By the action of the operational amplifier 41, the potential VB and the potential of the output terminal V_{out} are equal to the potential VC. At this time, the potentials at each end of the capacitor CA are the potential VA and potential VB respectively, and the following relation is established.

25 (Potential difference of capacitor CA) = (potential V_{ina} - potential VB) (39)

Likewise, as for the feedback capacitor CB, since the potentials at each end are the potential VB and potential VD respectively, their relation is as shown in Formula (40).

30 (Potential difference of capacitor CB) = (potential VD - potential VB) = (potential V_{inb} - potential VB) - (40)

- Next, in the discharge cycle, the analog switch SWF and analog switch SWD are set in OFF state, while the analog switch SWE is set on ON state. When the input digital data is 1, the analog switch SWB is set in
 35 ON state, and the analog switch SWA is set in OFF state. Accordingly, the potential VA is equal to the potential V_{inb} , and the potential difference at both ends of the capacitor CA is as shown in Formula (41).

(Potential difference of capacitor CA) = (potential V_{inb} - potential VB) (41)

- 40 Accordingly, the electric charges having been charged at the negative side electrode of the capacitor CA are moved to the feedback capacitor CB, and the electric charges are moved to the output terminal V_{out} side (positive side electrode) of the feedback capacitor CB in a manner to cancel this electric charge movement. The moving electric charge quantity ΔQ_{CB} is expressed in Formula (42).

45 $\Delta Q_{CB} = [\text{potential } V_{inb} - \text{potential } V_{ina}] \times (\text{capacitance of capacitor CA})$ (42)

The potential VB is not changed because a negative feedback is applied to the operational amplifier 41. Therefore, the potential of the output terminal V_{out} produced as a result of movement of the electric charges becomes as shown in Formula (43).

50

55

$$\begin{aligned}
 & \text{Potential of output terminal } V_{out} \\
 & = \text{potential } V_{inb} - \text{potential } V_B + \text{potential } V_B \\
 & - [\text{potential } V_{inb} - \text{potential } V_{ina}] \times (\text{capacitance of capacitor CA}) \\
 & / (\text{capacitance of capacitor CB}) \\
 & = \text{potential } V_{inb} - (\text{potential } V_{inb} - \text{potential } V_{ina}) \\
 & \times (\text{capacitance of capacitor CA}) / (\text{capacitance of capacitor CB}) \dots (43)
 \end{aligned}$$

On the other hand, when the input digital data is 0, the analog switch SWB is set in OFF state, and the analog switch SWA is set in ON state. Accordingly, the electric charges are not moved in the capacitor CA, and the potential of the output terminal V_{out} is in the relation of

$$\text{Potential of output terminal } V_{out} = \text{potential } V_{ina} \dots (44)$$

The potential difference

$$V_{inb} - V_{ina}$$

of the output terminal

$$V_{out}$$

when the input digital data is 1 and when 0 is

$$\begin{aligned}
 V_{inb} - V_{ina} & = (\text{potential } V_{inb} - \text{potential } V_{ina}) \\
 & \times (\text{capacitance of capacitor CA}) / (\text{capacitance of capacitor CB}) \\
 & \dots (45)
 \end{aligned}$$

In the embodiment in Fig. 7, incidentally, the potential V_D is set equal to the potential

$$V_{inb},$$

but it may be, otherwise, set equal to the potential

$$V_{ina}.$$

Thus, in the embodiment in Fig. 7, the analog switch SWE is connected between the output terminal

$$V_{out}$$

of the operational amplifier 41 and the other end of the feedback capacitor CB, and the analog switch SWD is connected between the output terminal

V_{out}

of the operational amplifier 41 and one end of the feedback capacitor CB so as to apply the same potential
5 as the potential

V_{inb}

10 or potential

V_{inb} ,

15 and the potential VC having the middle potential between the potential

V_{inb}

20 and potential

V_{inb}

25 is applied to the noninverting input terminal B of the operational amplifier 41. Therefore the operating point of the operational amplifier 41 may be set at the middle potential of the potential

V_{inb}

30

and potential

V_{inb} ,

35

that is, near the middle of the dynamic range of the operational amplifier 41. It is hence possible to realize the LCD control system resistant to fluctuations of supply voltage and excellent in supply voltage characteristics.

In Fig. 7, meanwhile, the analog switch SWA, analog switch SWB and capacitor CA are disposed by
40 one set each, and the input digital data of one bit is converted into analog signal, but it is also possible to dispose plural sets of analog switch SWA, analog switch SWB and capacitor CA individually to convert into digital data of multiple bits into analog signal. In this case, each capacitance of the plural capacitors CA may

Fig. 8 is a structural diagram showing the output circuit in the seventh embodiment of the LCD control
45 system of the invention. When the analog switch SWC is set in ON state, the potential V_{inc} is applied to the capacitor CA. The feedback capacitor CB is connected between the inverting input terminal A and output terminal V_{out} of the operational amplifier 41. The other constitution is same as in the output circuit in the sixth embodiment shown in Fig. 7.

In thus composed capacitive type DA converter incorporated in the LCD control system of the
50 embodiment, the operation is described below. It is supposed, as shown in Formula (46), that the potential VC and potential V_{inc} are a middle potential of the potential V_{ina} and potential V_{inb} .

$$\text{Potential VC} = \text{potential } V_{inc} = [\text{potential } V_{ina} + \text{potential } V_{inb}] / 2 \quad (46)$$

55 The operation of the capacitive type DA converter consists of the charge cycle of electric charges into the capacitor CA, and the discharge cycle of movement of the electric charges from the capacitor CA to the feedback capacitor CB and subsequent output from the output terminal V_{out} .

In the charge cycle, the analog switch SWC and analog switch SWF are set in ON state, while the

analog switch SWA and analog switch SWB are set in OFF state. Accordingly, the potential VA is equal to the potential V_{inc} . By the action of the operational amplifier 41, the potential VB and the potential at the output terminal V_{out} are equal to the potential VC. As a result, the potential difference at both ends of the capacitor CA is as shown in Formula (47).

5

$$(\text{Potential difference of capacitor CA}) = \text{potential } V_{inc} - \text{potential VB} \quad (47)$$

Next, in the discharge cycle, the analog switch SWC and analog switch SWF are set in OFF state.

In this state, when the input digital data is 1, the analog switch SWA remains OFF, while the analog switch SWB is turned on. To the contrary, when the input digital data is 0, the analog switch SWB remains OFF, and the analog switch SWA is turned on. Accordingly, the potential VA is equal to the potential V_{inb} when the input digital data is 1, and equal to the potential V_{ina} when the input digital data is 0.

Therefore, the potential difference at both ends of the capacitor CA, when the input digital data is 1, is as follows.

15

$$(\text{Potential difference of capacitor CA}) = \text{potential } V_{inb} - \text{potential VB} \quad (48)$$

When the input digital data is 0, the relation is

$$20 \quad (\text{Potential difference of capacitor CA}) = \text{potential } V_{ina} - \text{potential VB} \quad (49)$$

Accordingly, the electric charges having been charged at the negative side electrode of the capacitor CA are moved to the negative side electrode of the feedback capacitor CB, and the electric charges are moved to the output terminal V_{out} side of the feedback capacitor CB in such a manner as to cancel this movement of electric charges. The electric charge quantity ΔQ_{CB} being moved is, when the input digital data is 1, as follows.

$$\Delta Q_{CB} = [\text{potential } V_{inb} - \text{potential } V_{inc}] \times (\text{capacitance of capacitor CA}) \quad (50)$$

30 When the input digital data is 0, the relation is

$$\Delta Q_{CB} = [\text{potential } V_{ina} - \text{potential } V_{inc}] \times (\text{capacitance of capacitor CA}) \quad (51)$$

35 The potential VB is equal to the potential VC and is not changed because a negative feedback is applied to the operational amplifier 41. Therefore, the potential of the output terminal V_{out} is, when the input digital data is 1, determined as follows from Formula (50).

$$40 \quad (\text{Potential of output terminal } V_{out}) = \text{potential VB} - [\text{potential } V_{inb} - \text{potential } V_{inc}] \times (\text{capacitance of capacitor CA}) / (\text{capacitance of capacitor CB}) \quad (52)$$

When the input digital data is 0, the relation is

$$45 \quad (\text{Potential of output terminal } V_{out}) = \text{potential VB} - [\text{potential } V_{ina} - \text{potential } V_{inc}] \times (\text{capacitance of capacitor CA}) / (\text{capacitance of capacitor CB}) \quad (53)$$

The voltage difference V_{1-0} of the output terminal V_{out} when the input digital data is 1 and when 0 is

$$50 \quad V_{1-0} = [\text{potential } V_{ina} - \text{potential } V_{inb}] \times (\text{capacitance of capacitor CA}) / (\text{capacitance of capacitor CB}) \quad (54)$$

Thus, according to the embodiment in Fig. 8, by installing the analog switch SWC for applying the potential V_{inc} nearly in the middle between the potential V_{ina} and potential V_{inb} , and applying the potential VC equal to the voltage nearly in the middle between the potential V_{ina} and potential V_{inb} to the noninverting input terminal B of the operational amplifier 41, first the middle potential V_{inc} is sampled in the charge cycle, and then the output analog voltage may be varied, starting from the middle potential. Accordingly the LCD control system resistant to fluctuations of supply voltage and excellent in supply voltage characteristics may be realized. Besides, since the output analog voltage is also changed from the potential near the central

position, a high voltage is hardly applied to the analog switch SWF, and in this respect, too, the LCD control system of stable operation is realized.

In the embodiment in Fig. 8, too, the analog switch SWA, analog switch SWB, and analog switch SWC and capacitor CA may be disposed in plural sets each, and the input digital data of multiple bits may be converted into analog signal. At this time, the plural capacitors CA may be individually weighted.

Thus, in the embodiment shown in Fig. 7, the mutually different first and second potentials are selectively applied to one end of the capacitor according to the input digital data, the other end of the capacitor is connected to the inverting input terminal of the operational amplifier, and a potential nearly in the middle of the first and second potentials is applied to the noninverting input terminal of the operational amplifier, and moreover a potential equal to the first or second potential is applied to the other end of the feedback capacitor of which one end is connected to the inverting input terminal of the operational amplifier.

Besides, in the embodiment shown in Fig. 8, the mutually different first and second potentials, and a third potential having a potential near the middle of the first and second potentials are selectively applied to one end of the capacitor according to the input digital data, and the other end of the capacitor is connected to the inverting input terminal of the operational amplifier, and a same potential as the third potential is applied to the noninverting input terminal of the operational amplifier, and a feedback capacitor is connected between the inverting input terminal and output terminal of the operational amplifier.

By so constituting, the operating point of the operational amplifier may be set at a middle potential of the first and second potentials, and the operational amplifier may be operated nearly in the middle of its dynamic range. Hence, the LCD control system resistant to fluctuations of supply voltage and excellent in supply voltage characteristics may be realized.

An eighth embodiment of the LCD control system of the invention is described below.

In the LCD control system which repeats the charge cycle and discharge cycle periodically, the duration of the charge cycle is longer because the load by a large capacitance is charged and discharged in the charge cycle. As a result, the discharge cycle time is relatively shorter, and the power consumption increases by charging and discharging the load capacitor.

The eighth embodiment of the invention is intended to solve the above problems, and presents an LCD control system capable of shortening the charge cycle time and saving the power consumption.

In other words, in the embodiment, a switch for connecting and disconnecting the load is connected between the output terminal of the operational amplifier of the output circuit comprising a DA converter and the load capacitor of the liquid crystal panel, and this switch is set in OFF state in the charge cycle.

In this constitution, in the charge cycle, the load capacitor of the operational amplifier is cut off, and the load of the operational amplifier may be reduced, so that the operational amplifier may operate at high speed, while the power consumption is saved. Incidentally, in the discharge cycle, the switch for load connection and disconnection is set in ON state, and the load is connected to the output terminal of the operational amplifier, so that the liquid crystal capacitors of the liquid crystal panel may be charged and discharged as usual, and a desired display may be appeared.

The eighth embodiment of the output circuit comprising a DA converter for composing the LCD control system of the invention is described below while referring to Fig. 9 to Fig. 12.

Fig. 9 is a structural diagram showing the output circuit in the eighth embodiment of the LCD control system of the invention. In Fig. 9, a capacitor 52 is connected between the output terminal and inverting input terminal A of an operational amplifier 51, and functions as a negative feedback circuit, and a load capacitor 53 comprises a liquid crystal capacitor and wiring capacitor of the TFT liquid crystal panel (corresponding to the TFT liquid crystal panel 1 in Fig. 1). Plural capacitors 54 to 56 have their one end each connected to the inverting input terminal A of the operational amplifier 51. A switch 57 is connected between the output terminal and the inverting input terminal A of the operational amplifier 51. Switches 58 to 60 are connected between the other ends of the capacitors 54 to 56 and the power source terminal, and switches 61 to 63 are connected between the other ends of the capacitors 54 to 56 and the ground.

In the diagram, the switches 57 to 63 are shown in a form of mechanical switches, but actually they are analog switches becoming ON or OFF depending on the digital input data.

In the embodiment, a switch 64 for connection or disconnection of the load is connected between the output terminal of the operational amplifier 51 and the load capacitor 53. This switch 64 is also an analog switch turned on or off by the digital input data.

In thus composed LCD control system in Fig. 9, its operation is described below.

In this LCD control system, too, the basic operation consists of charge cycle and discharge cycle.

First the charge cycle is explained. In the charge cycle, the switch 57 is set in ON state, and the output terminal and inverting input terminal A of the operational amplifier 51 are short-circuited. At this time, the operational amplifier 51 works as voltage follower circuit.

In the charge cycle, moreover, the switch 64 for connecting and disconnecting the load is set in OFF state, and the load capacitor 53 is separated from the output terminal of the operational amplifier 51.

In this state, the switches 58 to 60 are set in ON state, and the switches 61 to 63 are set in OFF state. At this time, the equivalent circuit is as shown in Fig. 10. Since the inverting input terminal A of the operational amplifier 51 is assumed to be grounded, the supply voltage is applied to the capacitors 54 to 56.

At this time, the load capacitor 53 is not connected to the output terminal of the operational amplifier 51, and the output terminal of the operational amplifier 51 is directly connected to the inverting input terminal A which is assumed to be grounded. Accordingly, a stable state is established in a short time. In the stable state, the output voltage V_o of the operational amplifier 51 is at the ground level.

The discharge cycle is described below. Only three capacitors 54 to 56 are shown in Fig. 9, but actually there are as many as the number of bits of the digital input data that is entered, and therefore the switches 58 to 63 are also as many as the number of bits actually. In the discharge cycle, the switches 58 to 63 are set in OFF state or in ON state depending on the digital input data for liquid crystal display, and the electric charges stored in the capacitors 54 to 56 are discharged depending on the digital data.

In the discharge cycle, moreover, the switch 64 for connecting and disconnecting the load connected to the output terminal of the operational amplifier 51 is set in ON state, and the load capacitor 53 is connected to the output terminal of the operational amplifier 51.

When the digital input data is 0, as shown in Fig. 11A, the capacitors 54 to 56 remain connected to the power source terminals. At this time, since there is no change in the input voltage at the inverting input terminal A of the operational amplifier 51, the output voltage V_o of the output terminal remains at the ground level.

On the other hand, when the digital data is all 1, as shown in Fig. 11B, the capacitors 54 to 56 are connected to the ground. At this time, the input voltage of the inverting input terminal A of the operational amplifier 51 is changed in the negative direction against the ground, and hence the output voltage of the operational amplifier 51 is changed in the positive direction, thereby raising the output voltage V_o of the output terminal. This output voltage V_o is applied to the load capacitor (the liquid crystal capacitor of the liquid crystal panel) 53 through the switch 64 for connecting and disconnecting the load, so that the display corresponding to the input data is appeared.

Fig. 12 is a timing chart showing with the charging operation and the discharge operation when the input data is 1 in the embodiment in Fig. 9. In Fig. 12, t_1 denotes the time until the charge cycle shown in Fig. 10 is completed, and t_2 is the time until the discharge cycle is completed.

In the LCD control system in Fig. 9, since the load capacitor 53 is separated from the output terminal of the operational amplifier 51 at the time of charging, the charge cycle time t_1 can be shortened.

Thus, in the embodiment in Fig. 9, in the LCD control system repeating the charge cycle and discharge cycle periodically, the operating speed can be accelerated by separating the load from the output terminal of the operational amplifier in charge cycle. Besides, since the load capacitor is not charged or discharged in the charge cycle, the power consumption may be reduced.

A ninth embodiment of output circuit for composing the LCD control system of the invention is described below by referring to Fig. 13 and Fig. 14.

In Fig. 13, a reference power source 65 is connected to a noninverting input terminal B of an operational amplifier 51. A reference power source 66 is at the same potential as the reference power source 65. A switch 67 is connected between an inverting input terminal A of the operational amplifier 51 and the reference power source 66, and it is an electronic switch turned on or off by a digital signal. Except for the switch 64 for connecting and disconnecting the load, the other constitution is same as in the output circuit in the embodiment shown in Fig. 9.

In thus composed LCD control system in Fig. 13, its operation is explained below.

In this LCD control system, too, the basic operation consists of charge cycle and discharge cycle.

First the charge cycle is explained. In the charge cycle, the switch 57 is set in ON state, and the output terminal and inverting input terminal A of the operational amplifier 51 are short-circuited. At this time, the operational amplifier 51 works as voltage follower circuit. Furthermore, in the charge cycle, the switch 67 for the reference power source is set in ON state.

In this state, the switches 58 to 60 are set in ON state, and the switches 61 to 63 are set in OFF state. At this time, the equivalent circuit becomes as shown in Fig. 14. Since the inverting input terminal A of the operational amplifier 51 is assumed to be grounded, the supply voltage is applied to the capacitors 54 to 56.

To the inverting input terminal A of the operational amplifier 51, the reference power source 66 at the same potential as the reference power source 65 is connected. To the load capacitor of the feedback

circuit, the reference power source of a large output current and a stable voltage is connected, so that a stable state is established in a short time. In the stable state, the output voltage V_o of the operational amplifier 51 is at the ground level.

The discharge cycle is explained. Only three capacitors 54 to 56 are shown in Fig. 13, but actually there are as many as the number of bits of the digital input data that is entered, and the switches 58 to 63 are also as many as the number of bits. In the discharge cycle after opening the switch 67 for reference power source, the switches 58 to 63 are set in ON or OFF state depending on the digital input data for liquid crystal display, and the electric charges stored in the capacitors 54 to 56 are discharged depending on the digital input data. In the discharge cycle, switches 58 to 63 are set in ON or OFF state, the electric charges stored in the capacitors 54 to 56 are moved into the capacitor 52, and an analog voltage depending on the digital input data is generated.

In the embodiment in Fig. 13, too, same as in the embodiment in Fig. 9, the charge cycle time t_1 in Fig. 12 may be shortened.

Thus, in the embodiment in Fig. 13, by connecting the reference power source to the input terminal of the operational amplifier at the time of charge cycle, the charging speed to the load capacitor of the feedback circuit may be accelerated.

The output circuits of the LCD control system in the foregoing embodiments are all composed of capacitive type DA converter, but it may be also possible to compose by using resistors, current source or oversampling.

Referring to Fig. 15, a tenth embodiment of an output circuit composed of a DA converter using resistors is explained below.

The switches 73 to 77 are turned on or off depending on the weight of the digital gray scale data. The resistors 78 to 82 divide the reference voltage 72, and generate gray scale voltages. Of the plural gray scale voltages generated by dividing, one gray scale voltage corresponding to the digital gray scale data is selected by one of the switches 73 to 77. The selected gray scale voltage is delivered through an operational amplifier 71 functioning as a voltage follower circuit.

The resistance type DA converter in Fig. 15 divides the reference voltage by plural resistors, and generates gray scale voltages and selects, among these gray scale voltages, the gray scale voltage depending on the digital gray scale data by the switches.

In the embodiment in Fig. 15, all resistance values of resistors are equal, but the number of resistors may be decreased by using a resistor having the resistance value proportional to the factorial of bits.

An eleventh embodiment of an output circuit composed of a DA converter using resistors is shown below while referring to Fig. 16.

The switches 94 to 97 are turned on or off depending on the digital gray scale data. Supposing all resistance values of input resistors 98 to 101 to be equal, the input currents flowing in the input resistances are all equal. The switches 94 to 97 are as many as the number of gray scales. When the switches 94 to 97 in the number corresponding to the digital gray scale data are set in ON state, an input current corresponding to the gray scale flows into the feedback resistor 92. An output voltage corresponding to the input current is generated by the operational amplifier 91 and the feedback resistor 92 functioning as current/voltage conversion circuit.

In the embodiment in Fig. 16, the resistance values of all input resistors are equal, but the number of resistors may be decreased by using the resistor having a resistance value proportional to the factorial of bits.

A twelfth embodiment of an output circuit composed of a DA converter using constant current source is described below by reference to Fig. 17.

The switches 114 to 117 are turned on or off depending on the digital gray scale data. The constant current sources 118 to 121 as many as the number of gray scales are provided. Some of the constant current sources 118 to 121 are selected by some of the switches 114 to 117. The selected constant current sources are delivered by the operational amplifier 111 and the feedback resistance 112 functioning as current/voltage conversion circuit.

In the embodiment in Fig. 17, all current values of constant current sources are equal, but the number of constant current sources may be decreased by using a constant current source having the current value proportional to the factorial of bits.

A thirteenth embodiment of an output circuit composed of a DA converter using oversampling method is explained below by reference to Fig. 18.

In the embodiment in Fig. 18, the digital gray scale data is not transferred parallel, but is transferred serially. Examples of serial data are shown in Fig. 19. Fig. 19 is an example of transferring the pulse strings t_1 equal to the gray scale value of the digital gray scale data in a specific cycle t_2 . By the transfer serial

data in Fig. 19, the switch 127 in Fig. 18 is turned on and off, a constant electric charge is moved from the reference voltage 126 to the integrating circuit 125. As a result, a voltage in an amplitude proportional to the digital gray scale data is generated in the integrating circuit 125.

According to the LCD control system of the invention, by disposing the DA converter immediately before the liquid crystal panel and processing the gray scale data directly in digital form without having to processing into analog form, the high speed analog circuit and regulating circuit may be omitted, and a display picture of high quality is obtained.

By employing the data latch means for storing the gray scale data and the adjustment-free DA converter for converting the output of digital data latch means into analog signal to be applied to the liquid crystal panel, the high speed analog circuit and regulating circuit are not needed, and the adjusting circuits necessary in the amplifier and the like may be reduced, so that the mass producibility may be enhanced.

According to the output circuit used in the LCD control system of the invention, by turning on or off the switches depending on the bit information of digital signal, charging and discharging of capacitors may be realized by a reference voltage, and a necessary output voltage is generated, and it is hence not necessary to use many reference voltages. Therefore, the number of wirings and number of circuits may be reduced.

Claims

1. A liquid crystal display control system comprising:
 - a. a liquid crystal panel,
 - b. plural data latch means for storing digital gray scale data, and
 - c. plural DA converters for converting the outputs of the data latch means into analog signals to be applied to the liquid crystal panel.
2. A liquid crystal display control system comprising:
 - a. a liquid crystal panel,
 - b. inverting control means for inverting a digital gray scale data in a specific period,
 - c. plural data latch means for storing the digital output of the inverting control means, and
 - d. plural DA converters for converting the outputs of the data latch means into analog signals to be applied to the liquid crystal panel.
3. A liquid crystal display control system furnished with an output circuit comprising:
 - a. input means for entering digital signals,
 - b. a capacitor group composed of capacitors possessing identical capacitance,
 - c. a switch group to be turned on or off depending on the bit information of the digital signals for controlling the capacitors of the capacitor group, and
 - d. an amplifier for generating an output voltage proportional to the voltage obtained by averaging the electric charges stored in a specified number of capacitors by all capacitors of the capacitor group by turning on a specific switch of the switch group.
4. A liquid crystal display control system furnished with an output circuit comprising:
 - a. input means for entering n-bit (n: a positive integral number) digital signals,
 - b. a capacitor group composed of n capacitors connected in parallel,
 - c. a switch group of switches for controlling charge and discharge of the capacitors, which is connected to the capacitors of the capacitor group to be turned on or off depending on the bit information of the digital signals, and
 - d. an amplifier for generating an output voltage proportional to the voltage generated by the electric charges of the capacitor charged according to the bit information of the digital signals out of the capacitors in the capacitor group.
5. A liquid crystal display control system furnished with an output circuit comprising:
 - a. input means for entering digital signals of $n \times m$ bits (n, m: a positive integral number),
 - b. a capacitor group composed of m sets of n capacitors connected in parallel,
 - c. a switch group of switches for controlling charge and discharge of the capacitors, which is connected to the capacitors of the capacitor group to be turned on or off depending on the bit information of the digital signals,
 - d. a power source group of power sources provided in each set for composing the capacitor group for supply voltages of 2 to the power of $(-n) \times 0$ to 2 to the power of $(-n) \times (m-1)$ of the specified

reference voltage of the capacitors for composing each set, and

e. an amplifier for generating an output voltage proportional to the voltage generated by the electric charges of the capacitor charged by each power source of the power source group according to the bit information of the digital signal out of the capacitors in the capacitor group.

5

6. A liquid crystal display control system furnished with an output circuit comprising:

a. input means for entering digital signals of $n \times m$ bits,

b. a capacitor group composed of m sets of n capacitors connected in parallel,

10 c. a switch group of switches for controlling charge and discharge of the capacitors, which is connected to the capacitors of the capacitor group to be turned on or off depending on the bit information of the digital signals,

d. $(m-1)$ dividing capacitors connected in series of the capacitors of $(m-1)$ sets excluding the set corresponding to the most significant n bits of the digital signal, and connected in series of the capacitors of the set corresponding to the next significant n bits, and

15 e. an amplifier for generating an output voltage proportional to the voltage generated by the electric charges of the capacitor charged by each power source of the power source group according to the bit information of the digital signal out of the capacitors in the capacitor group.

7. A liquid crystal display control system furnished with an output circuit comprising:

20 a. input means for entering digital signals of $n \times m$ bits,

b. a capacitor group composed of m sets of n capacitors connected in parallel,

c. a switch group of switches for controlling charge and discharge of the capacitors, which is connected to the capacitors of the capacitor group to be turned on or off depending on the bit information of the digital signals,

25 d. $(m-1)$ dividing capacitors connected in series of the capacitors of $(m-1)$ sets excluding the set corresponding to the most significant n bits of the digital signal, and connected parallel to the capacitors of the set corresponding to the next most significant n bits,

e. an amplifier for generating an output voltage proportional to the voltage generated by the electric charges of the capacitor charged by each power source of the power source group according to the bit information of the digital signal out of the capacitors in the capacitor group, and

30 f. $(m-1)$ switches connected parallel to the $(m-1)$ dividing capacitors respectively.

8. A liquid crystal display control system furnished with an output circuit comprising:

a. a capacitor,

35 b. first and second switches for selectively applying mutually different first and second potentials to one end of the capacitor according to a digital signal,

c. an amplifier having its inverting input terminal connected to the other end of the capacitor, in which a potential near the middle of the first and second potentials is applied to its positive input terminal,

40 d. a third switch connected between the inverting input terminal and output terminal of the amplifier,

e. a feedback capacitor having one end connected to the inverting input terminal of the amplifier,

f. a fourth switch connected between the other end of the feedback capacitor and the output terminal of the amplifier, and

45 g. a fifth switch connected between the other end of the feedback capacitor and a potential point having a potential same as the first or second potential.

9. A liquid crystal display control system furnished with an output circuit comprising:

a. a capacitor,

50 b. first, second and third switches for selectively applying mutually different first and second potentials, and a third potential having a potential near the middle of the first and second potentials, to one end of the capacitor depending on a digital signal,

c. an amplifier having its inverting input terminal connected to the other end of the capacitor, in which a same potential as the third potential is applied to its positive input terminal,

55 d. a fourth switch connected between the inverting input terminal and output terminal of the amplifier, and

e. a feedback capacitor connected between the inverting input terminal and output terminal of the amplifier.

10. A liquid crystal display control system furnished with an output circuit comprising:
- a. an amplifier,
 - b. a capacitor functioning as a negative feedback circuit of the amplifier,
 - c. plural capacitor groups connected parallel to the input terminal of the amplifier,
 - 5 d. plural switch groups connected to the capacitors of the capacitor groups, which are turned on or off according to the digital signals for a liquid crystal display to control charge and discharge of the capacitors, thereby varying the electric charges of each capacitor, and
 - e. a switch connected between the liquid crystal display and the output terminal of the amplifier, wherein:
 - 10 f. the charging action on the plural capacitor groups and the output action of analog signals are determined to be repeated periodically, and the switch is set in OFF state in the charging action so as to separate the liquid crystal display from the output terminal of the amplifier.
11. A liquid crystal display control system furnished with an output circuit comprising:
- 15 a. an amplifier,
 - b. a capacitor functioning as a negative feedback circuit of the amplifier,
 - c. plural capacitor groups connected parallel to one input terminal of the amplifier,
 - d. plural switch groups connected to the capacitors of the capacitor groups, which are turned on or off depending on the digital signal for a liquid crystal display to control charge and discharge of the capacitors, thereby varying the electric charges of each capacitor,
 - 20 e. a reference power source applied to the other input terminal of the amplifier, and
 - f. a switch for applying a voltage equal to the reference power source to one input terminal of the amplifier, wherein
 - g. the charging action on the plural capacitor groups and the output action of analog signals are determined to be repeated periodically, and the switch for applying a voltage equal to the reference power source to one input terminal of the amplifier is set in ON state in specific period of the charging action, and is set in OFF state in the output action.
 - 25
12. A liquid crystal display control system furnished with an output circuit comprising:
- 30 a. an amplifier,
 - b. plural resistors connected in series to a reference voltage, and
 - c. plural switches connected between the interconnecting nodes of each resistor and an input terminal of the amplifier respectively, which are turned on or off depending on the digital signal for a liquid crystal display.
 - 35
13. A liquid crystal display control system furnished with an output circuit comprising:
- a. an amplifier,
 - b. plural switches connected in parallel to a reference voltage, which are turned on or off depending on the digital signal for a liquid crystal display, and
 - 40 c. plural resistors connected between the plural switches and an input terminal of the amplifier respectively.
14. A liquid crystal display control system furnished with an output circuit comprising:
- a. an amplifier,
 - 45 b. plural constant current sources, and
 - c. plural switches connected between the plural constant current sources and an input terminal of the amplifier, which are turned on or off depending on the digital signal for a liquid crystal display.
 - 50
 - 55

FIG. 1

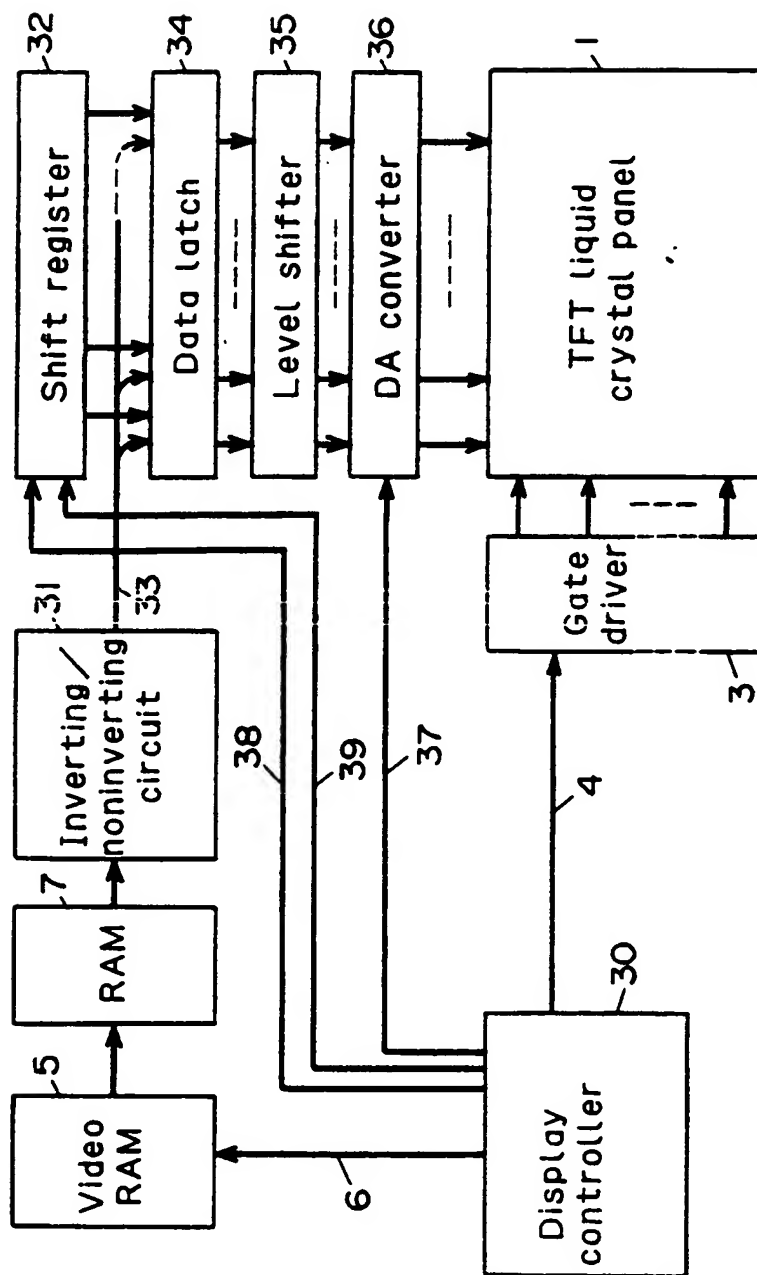


FIG. 2

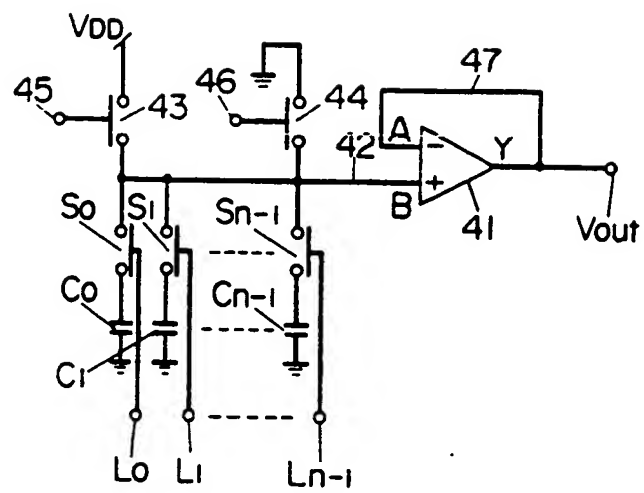


FIG. 3

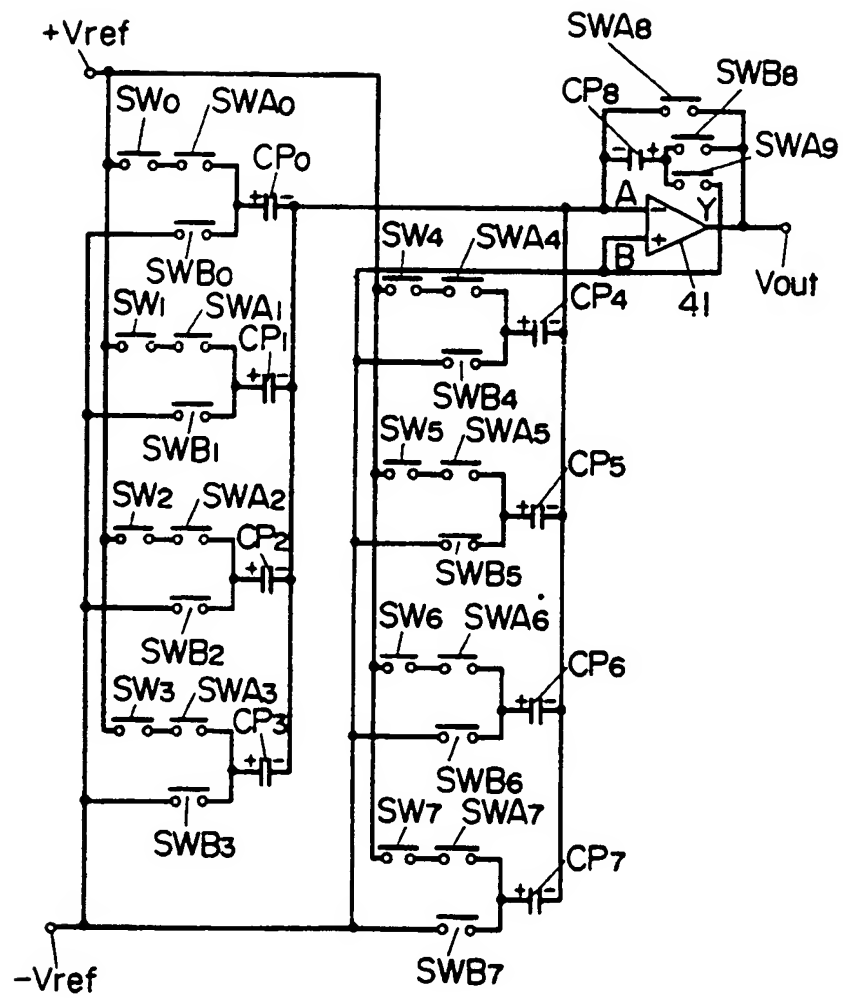


FIG. 4

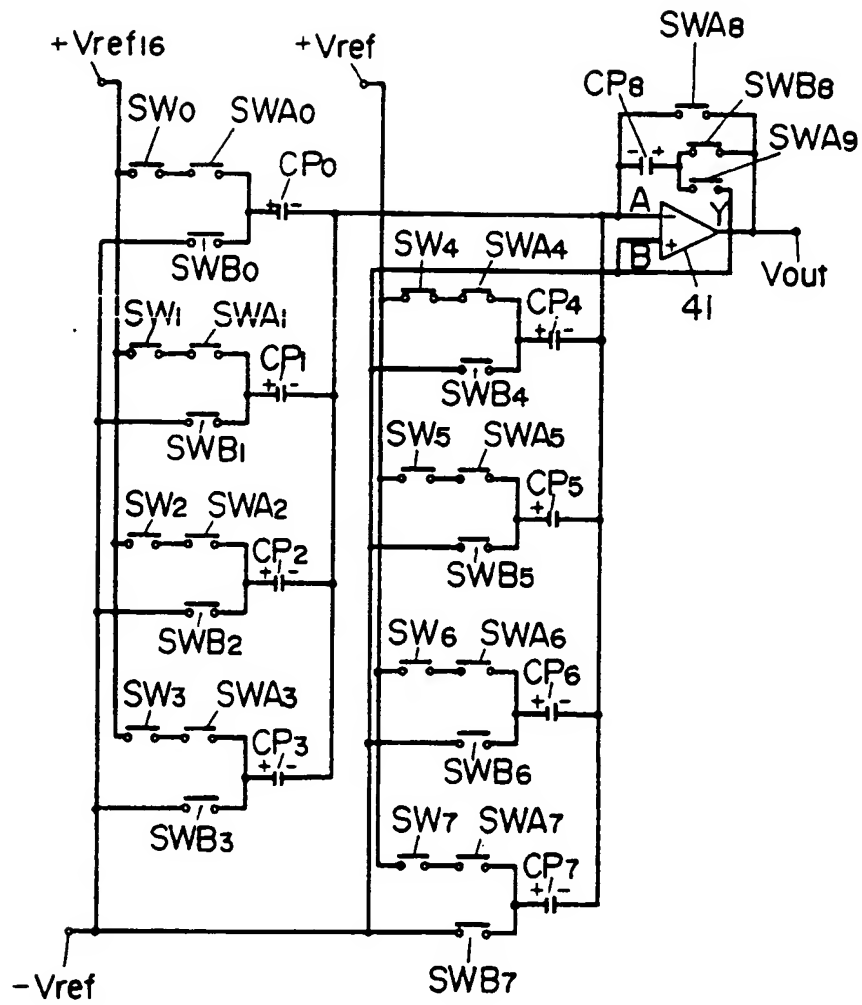


FIG. 5

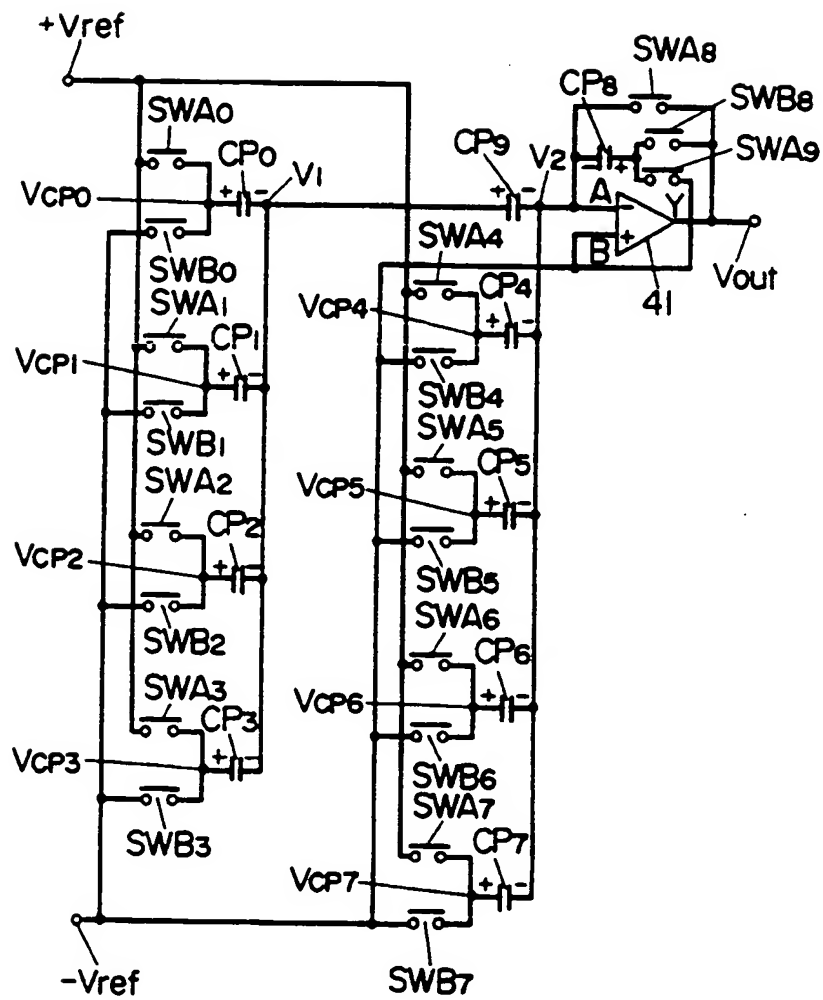


FIG. 6

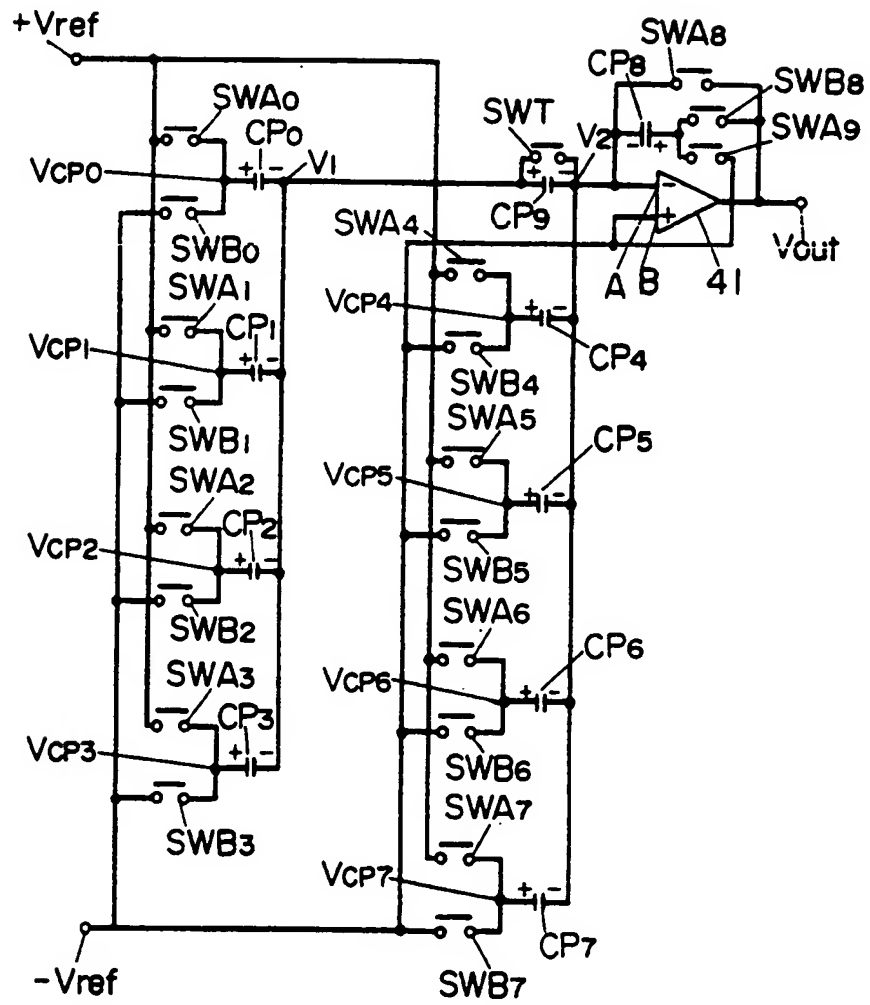


FIG. 7

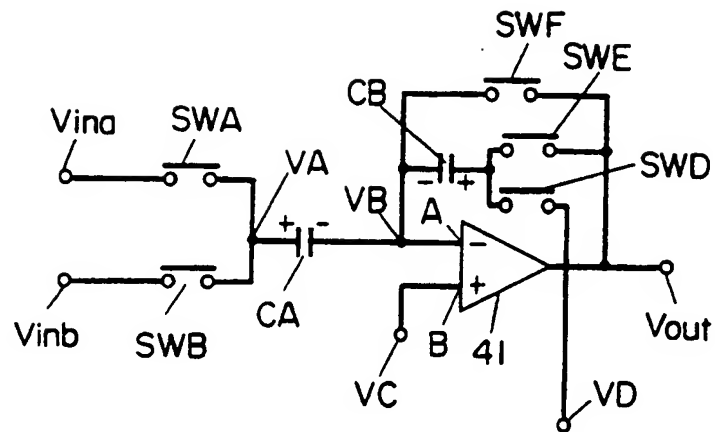


FIG. 8

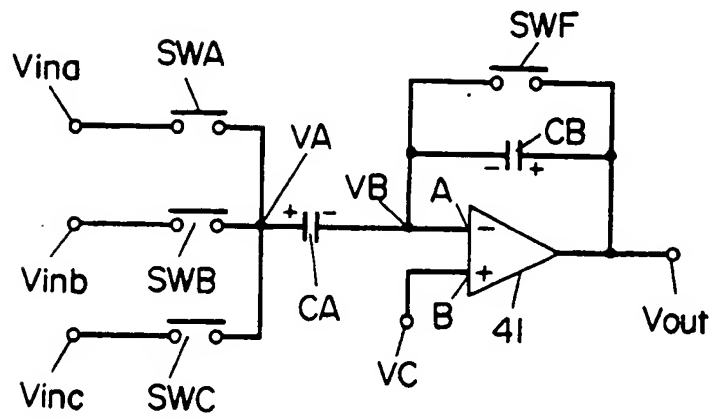


FIG. 9

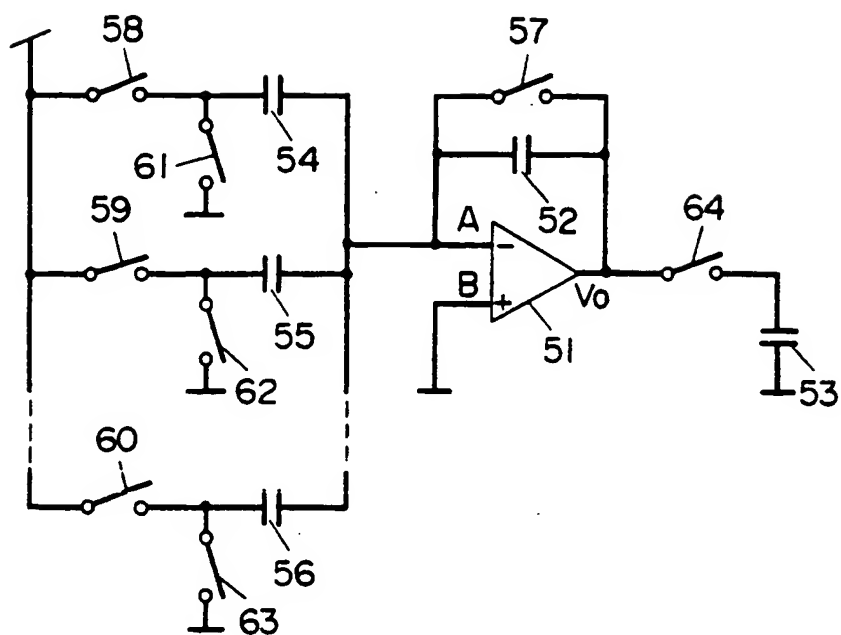


FIG. 10




FIG. 11

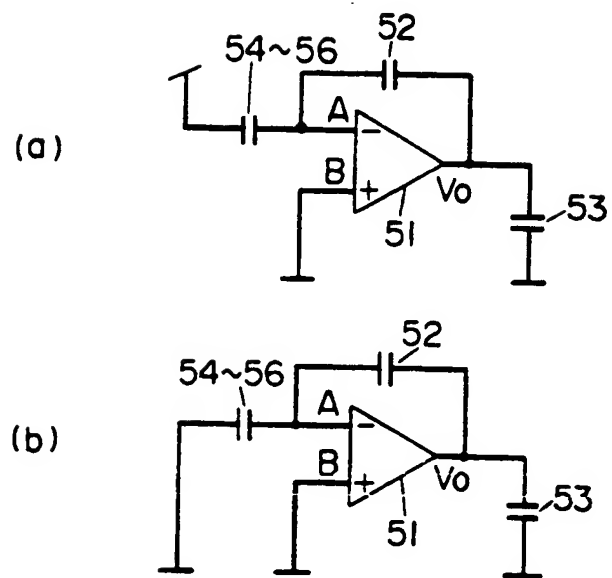


FIG. 12

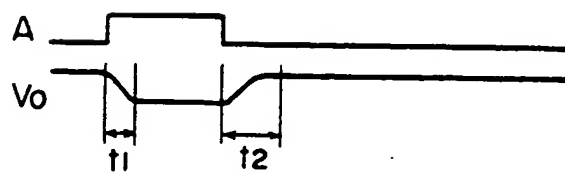


FIG. 13

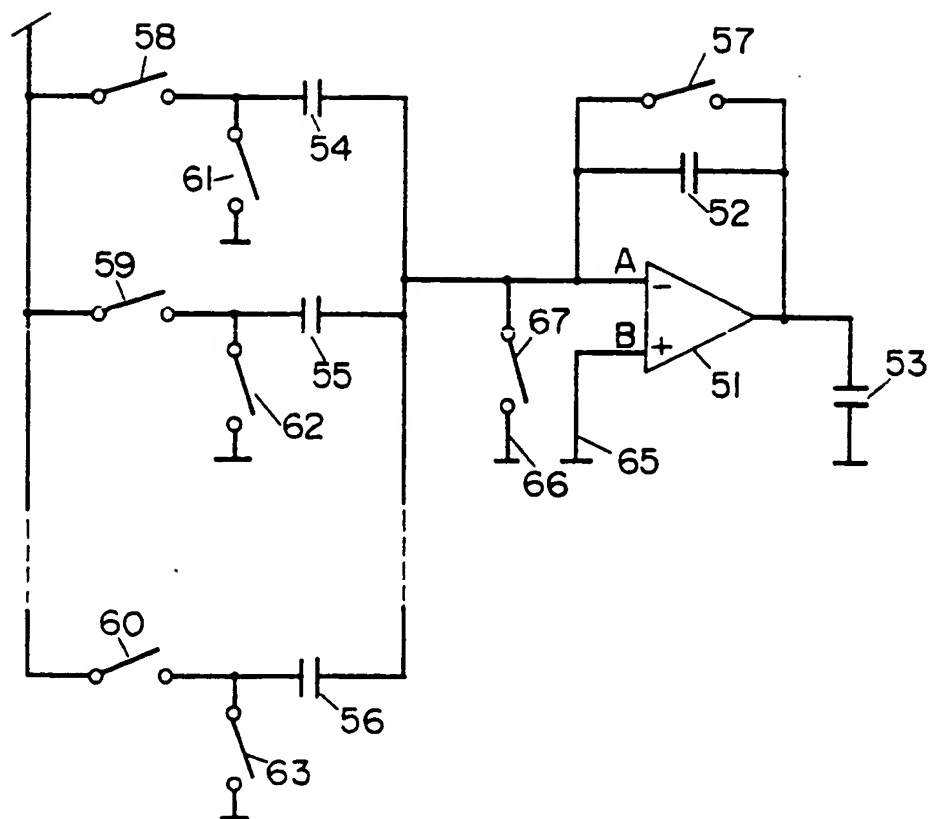


FIG. 14

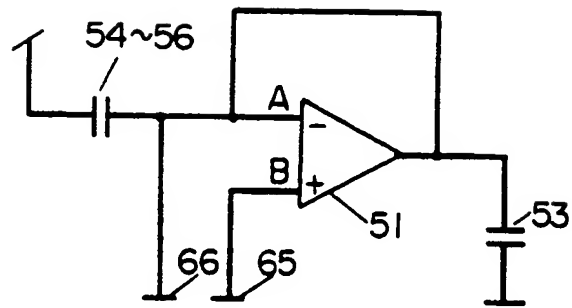


FIG. 15

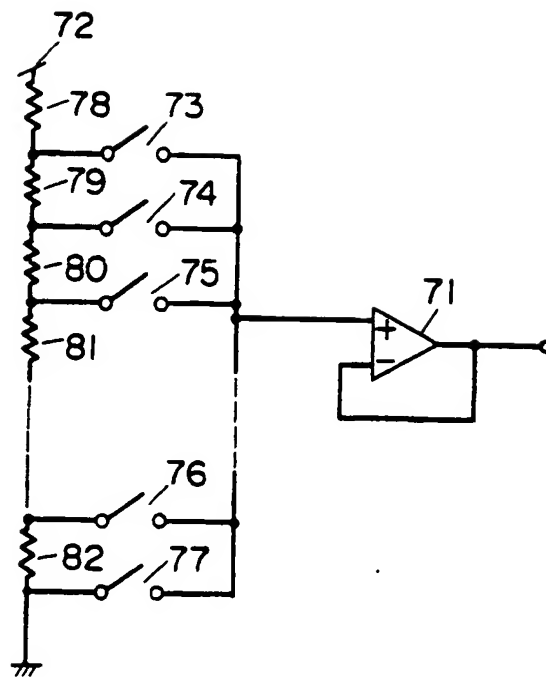


FIG. 16

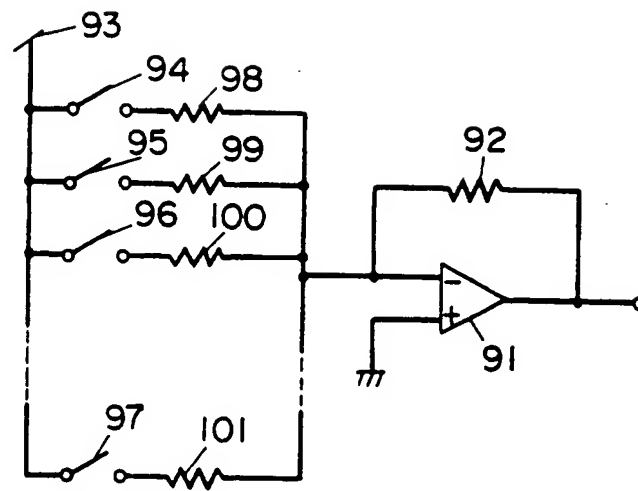


FIG. 17

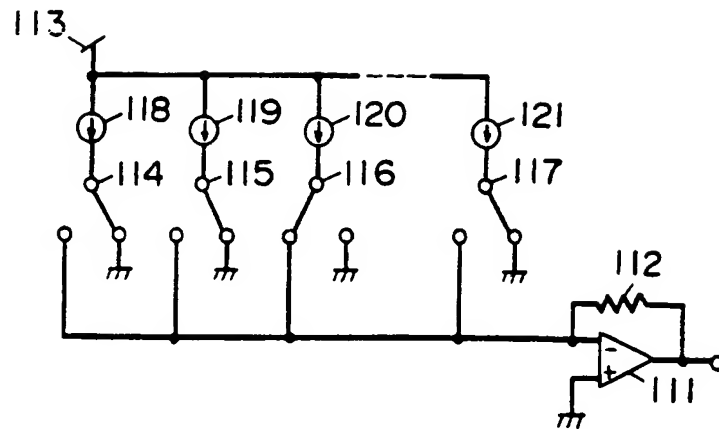


FIG. 18

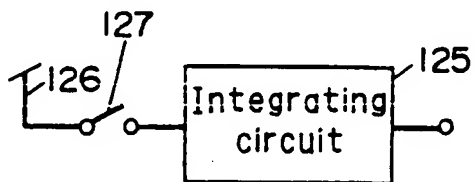


FIG. 19


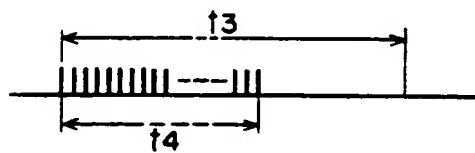


FIG. 20



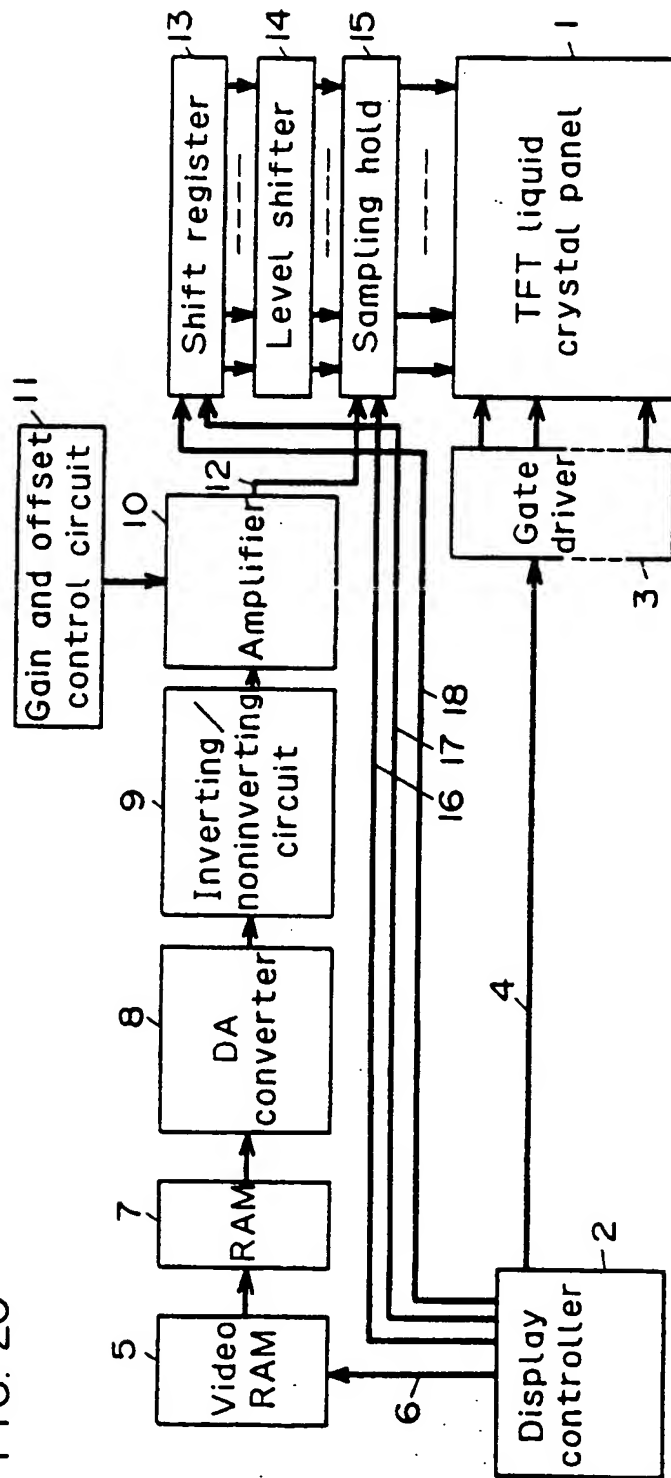

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

DOCUMENTS CONSIDERED TO BE RELEVANT			EP 92107070.2
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL.5)
A	<u>GB - A - 2 164 190</u> (CASIO) * Fig. 1,6 * --	1	G 09 G 3/36
A	<u>US - A - 3 879 723</u> (HORNUNG) * Fig. 5 * -----	1	
			TECHNICAL FIELDS SEARCHED (Int. CL.5)
			G 02 F 1/00 G 09 G 3/00
The present search report has been drawn up for all claims			
Place of search VIENNA		Date of completion of the search 13-08-1992	Examiner KUNZE
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons Δ : member of the same patent family, corresponding document	